

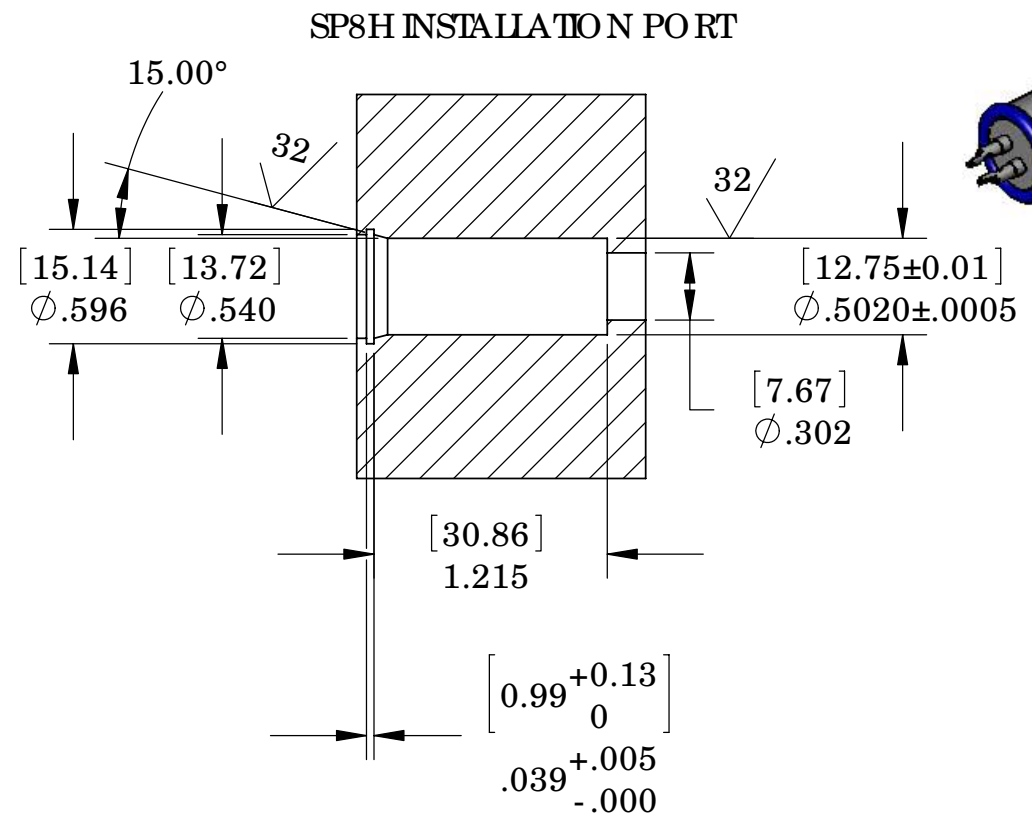


DETAIL G  
SCALE 2:1  
[12.57]  
Ø.495

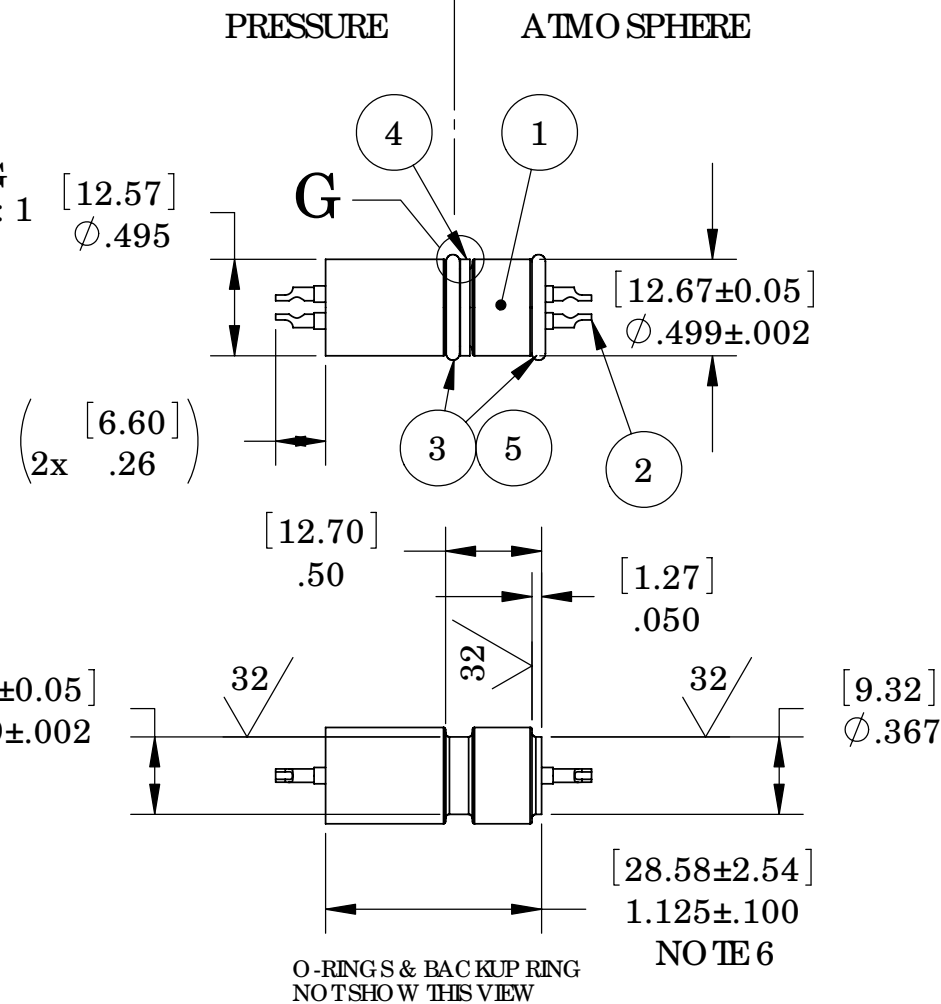

RECOMMENDED RETAINING RING  
TRUARC # 5000-56 OR EQUAL



**NOTES:**

1. LEAK TEST 5800 PSI (400 BAR), NO BUBBLES 15 SECONDS MINIMUM.
2. HYPOT 1000 VDC 100 MEG OHMS MINIMUM 0.01 SECOND MINIMUM SOLDER CUP TO SOLDER CUP.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. NO VOIDS ARE ACCEPTABLE ON O-RING SEALING SURFACES, VOIDS SMALLER THAN Ø 0.035 ARE ACCEPTABLE ON ALL OTHER SURFACES.
6. DIMENSION IS OVER-ALL-LENGTH EXCLUDING OVERFILL ON PRESSURE SIDE OF HOUSING.
7. REF-OPERATING TEMPERATURE -20 °C TO 150 °C.

5	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM BASED
4	1	-012 TEFLON	RING -012 TEFLON BACKUP SCARF CUT
3	2	-012 VITON	O-RING -012 VITON 75
2	4	1485	CONTACT # 18-22 SOLDER CUP GOLD PLATE
1	A/R	PAVE-Seal 200	EPOXY BLACK
<b>ITEM</b>	<b>QTY</b>	<b>PART NUMBER</b>	<b>DESCRIPTION</b>

**PAVE technology co.**  
2751 Thunderhawk Court  
Dayton, OH 45414-3445  
U.S.A.  
tel (937) 890-1100  
fax (937) 8905165  
www.pave technology co.com

DESCRIPTION  
SP8H-E-200-2-20-SC-SC

PART NUMBER  
**3327**

MATERIAL  
NOTED

REVISION LEVEL  
A

PROJECTION  
⊙ ◁

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.  
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5  
X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005  
ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS