


NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES 5 MINUTES MINIMUM.
2. HYPOT 630 VDC 500 MΩ 0.01 SEC MINIMUM, WIRE TO WIRE & HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. WIRES ARE NOT REQUIRED TO BEND SHARPLY AT EPOXY SEAL SURFACE.
6. NO VOIDS LARGER THAN $\phi.035$ [.89] ARE ACCEPTABLE.
7. DIMENSIONS ARE INCHES [millimeters].
8. REF- OPERATING TEMP: -20 TO 150°C.

3	A/R	PAVE-Seal 200	EPOXY BLACK
2	1	3354	HOUSING PT4-B
1	2	TT20	CABLE T/C TYPE T#20 TEFLON
ITEM	QTY	PART#	DESCRIPTION

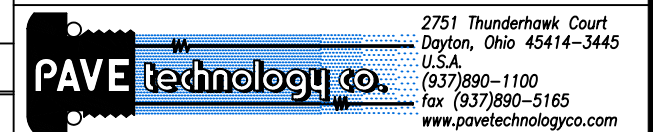

DESCRIPTION PAVE-Seal® Cable Harnesses
PT4-B-200-1P-TT20-96-24

PART NUMBER
3462

REVISION LEVEL
PROJECTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5
.X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005
ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS