


NOTES:

1. HE LEAK TEST@ 1 ATM 10X10⁻⁷ CC/S OR LESS.
2. HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND HOUSING.
3. CONTINUITY TEST <.5 Ohms MATING PLUG TO MATING PLUG.
4. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
5. ALL PARTS MUST PASS ALL TESTS.
6. COSMETIC SURFACE VOIDS SMALLER THAN Ø0.035 [0.89] ARE ACCEPTABLE.
7. DIMENSION IS OAL EXCLUDING OVERFILL ON BOTH SIDES OF HOUSING.
8. REF-OPERATING TEMPERATURE -20°C TO 80°C.
9. DIMENSIONS ARE INCHES [MILLIMETERS].
10. PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.
11. ALCOHOL OR FOMBLIN YVAC 3 MAY BE USED TO LUBRICATE O-RINGS FOR VACUUM HELIUM LEAK TESTING.

WIRING DIAGRAM

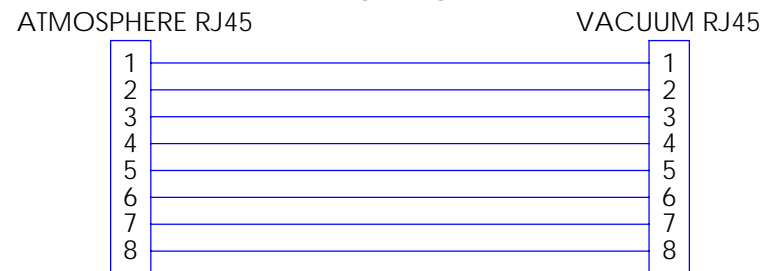

4	A/R	PAVE-Seal 150	EPOXY BLACK
3	1	-134 VITON	O-RING -134 VITON 75
2	2	855070001	RCPT VERTICAL SHIELDED 8 PIN RJ45
1	1	4019	HOUSING VS22W-SS
ITEM	QTY	PART NUMBER	DESCRIPTION

PAVE technology co.

2751 Thunderhawk Court
Dayton, OH 45414-3445
U.S.A.
tel (937) 890-1100
fax (937) 8905165
www.pavetechnologyco.com

DESCRIPTION
VS22W-SS-150-8-24-RJ45-RJ45

PART NUMBER
3933

MATERIAL NOTED

REVISION LEVEL
C

PROJECTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS