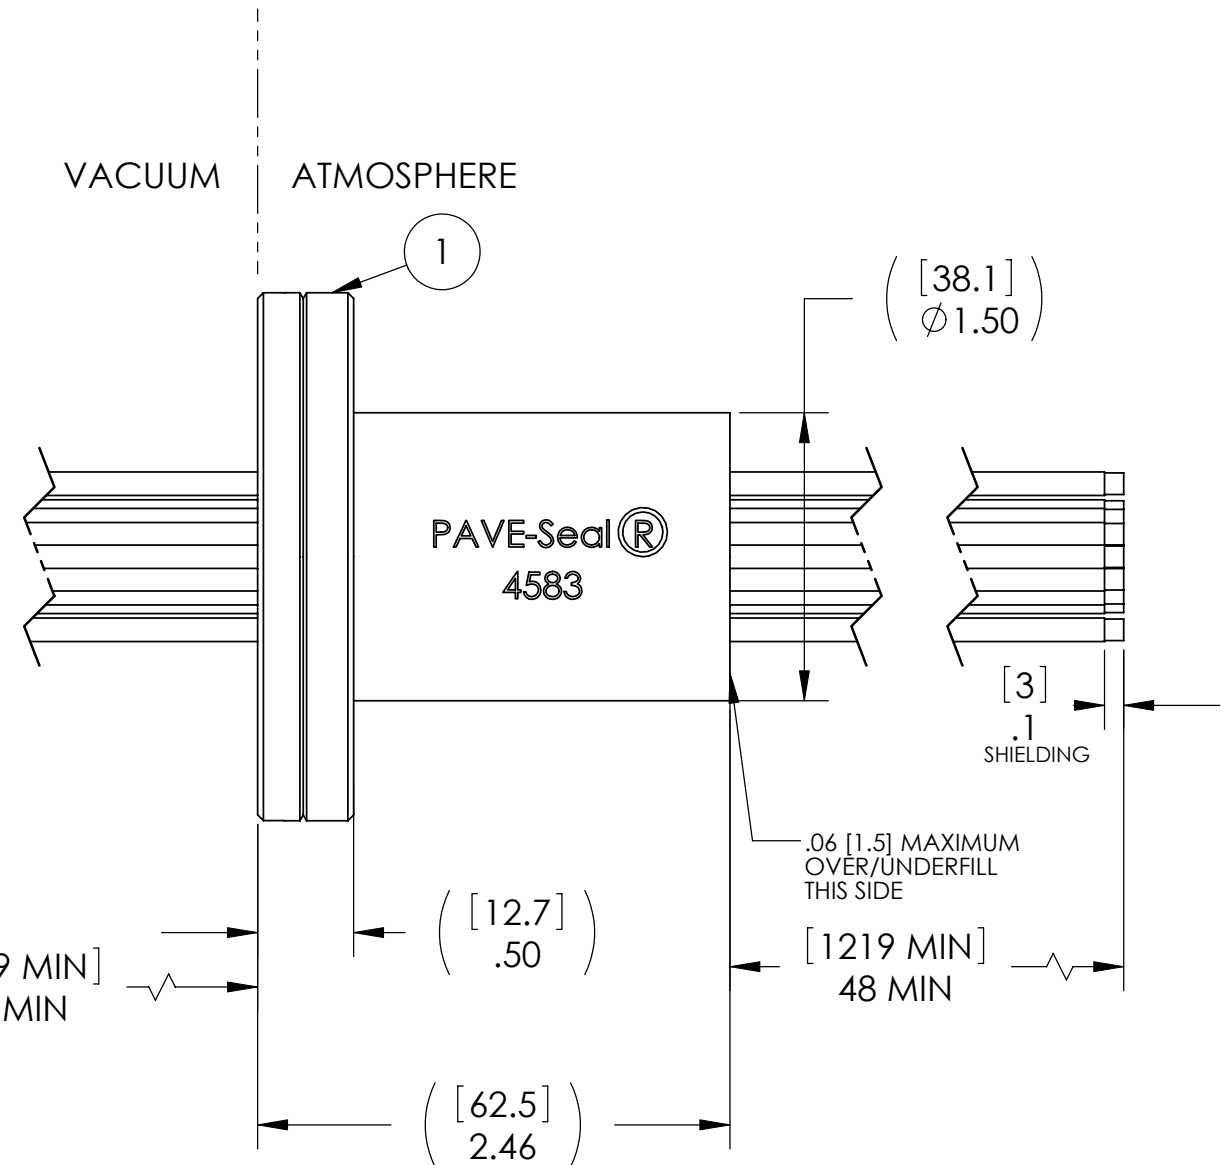
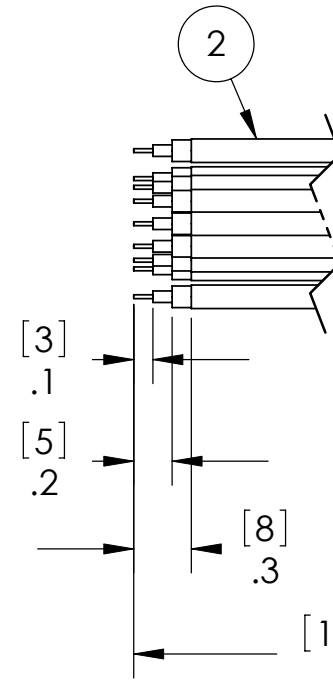
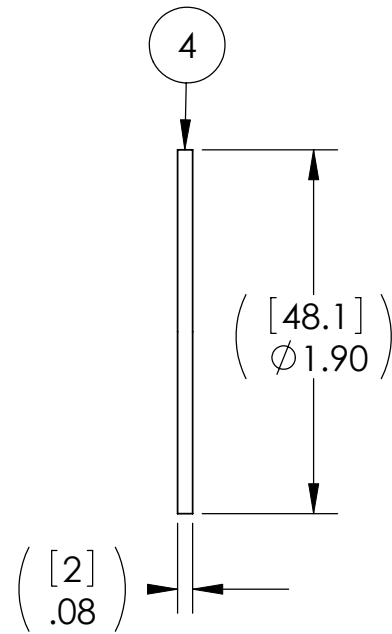
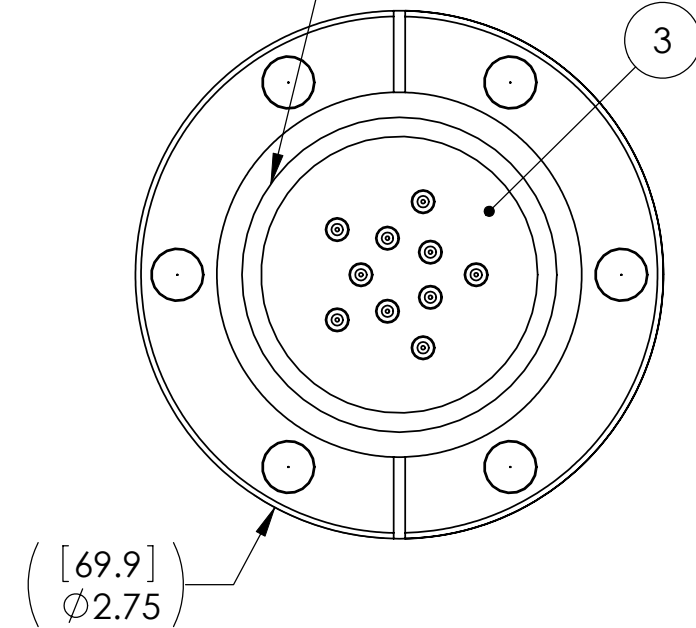



NO EPOXY ALLOWED ON KNIFE EDGE



NOTES:



1. HE LEAK TEST @ 1 ATM 10X10⁻⁷ CC/SEC OR LESS. LEAK TEST IS PERFORMED USING A G-275 VITON GASKET.
2. HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE, SHIELD & HOUSING.
3. CONTINUITY TEST <.5Ω SHIELDING END TO END.
4. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
5. ALL PARTS MUST PASS ALL TESTS.
6. WIRE POSITIONING IS APPROXIMATE & VARIABLE.
7. COSMETIC SURFACE VOIDS SMALLER THAN Ø0.035 [.89] ARE ACCEPTABLE.
8. REF-OPERATING TEMPERATURE -20 °C TO 125 °C..
9. DIMENSIONS ARE INCHES [millimeters].

4	1	GASKET G-275 C	GASKET COPPER
3	A/R	PAVE-Seal 150	EPOXY BLACK
2	10	RG188-DS	CABLE COAX 0.122 DIA WITH DOUBLE SHIELDED WHITE PTFE JACKET
1	1	1473	HOUSING CF275-SS
ITEM	QTY	PART NUMBER	DESCRIPTION


 2751 Thunderhawk Court
 Dayton, OH 45414-3445
 U.S.A.
 tel (937) 890-1100
 fax (937) 8905165
 www.pavetechnologyco.com

DESCRIPTION
 CF275-SS-150-10-RG188DS-48-48

PART NUMBER
4583

MATERIAL NOTED
 REVISION LEVEL -
 PROJECTION  

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
 X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
 ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS