
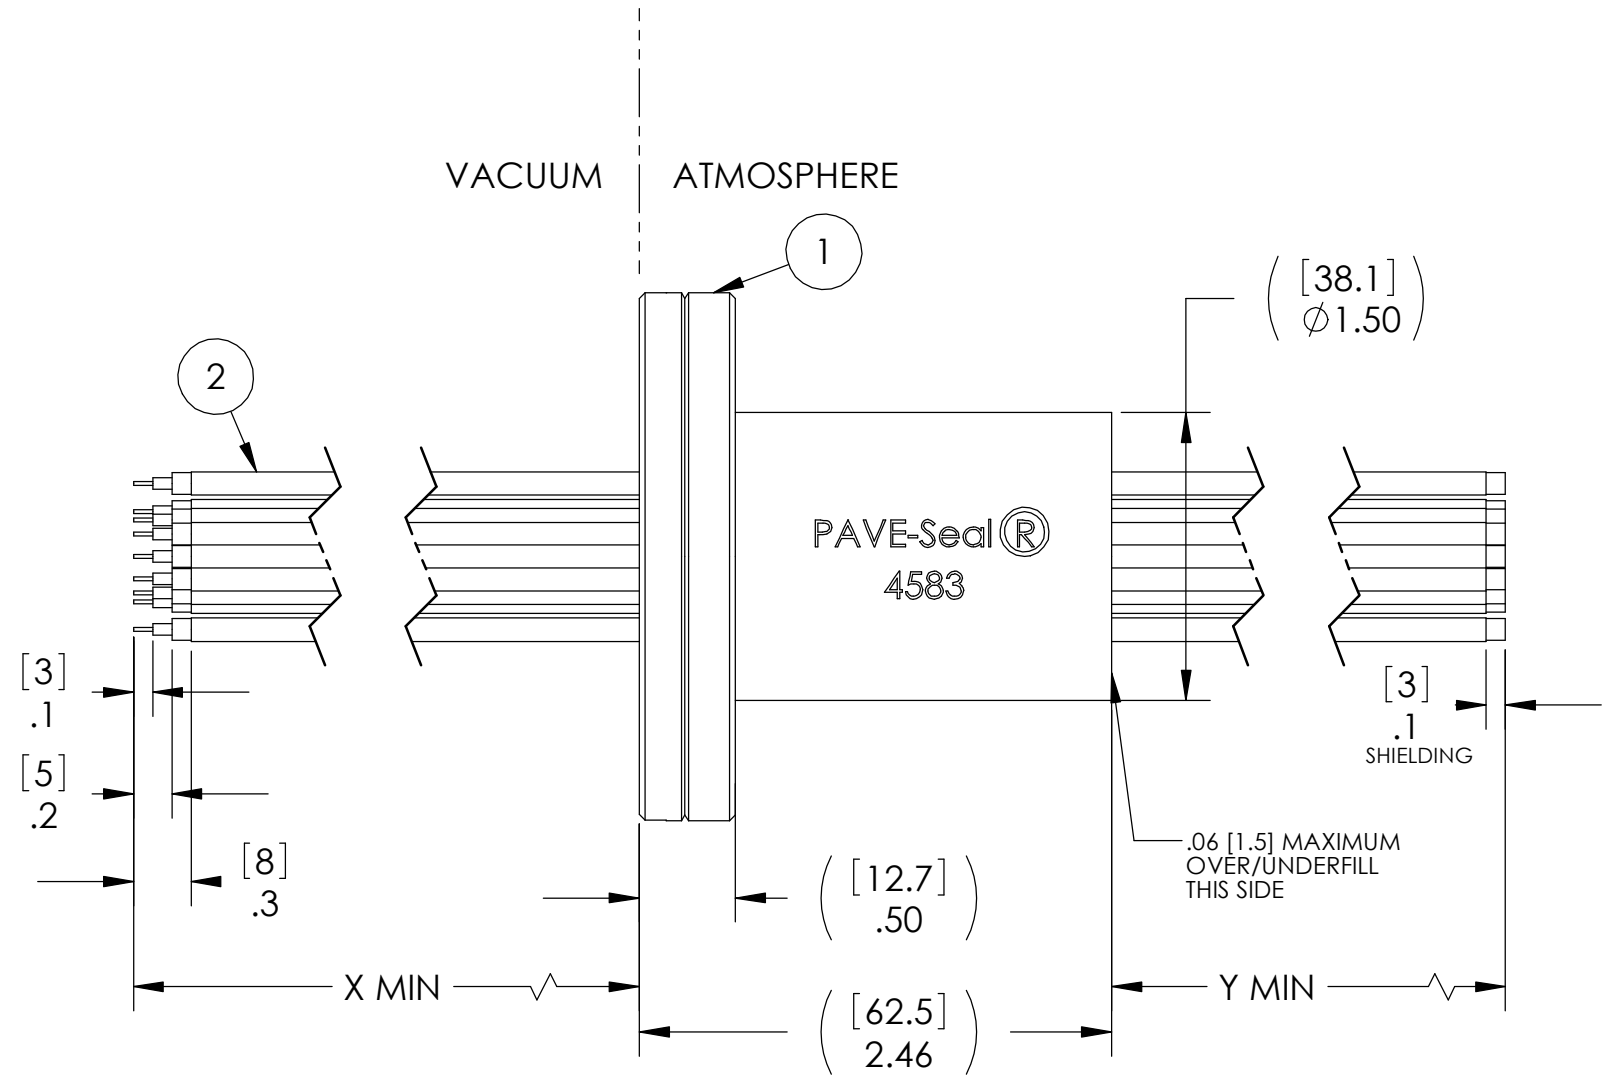
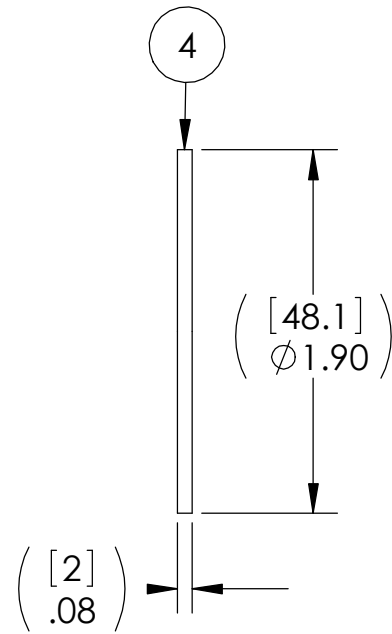


NO EPOXY ALLOWED ON KNIFE EDGE

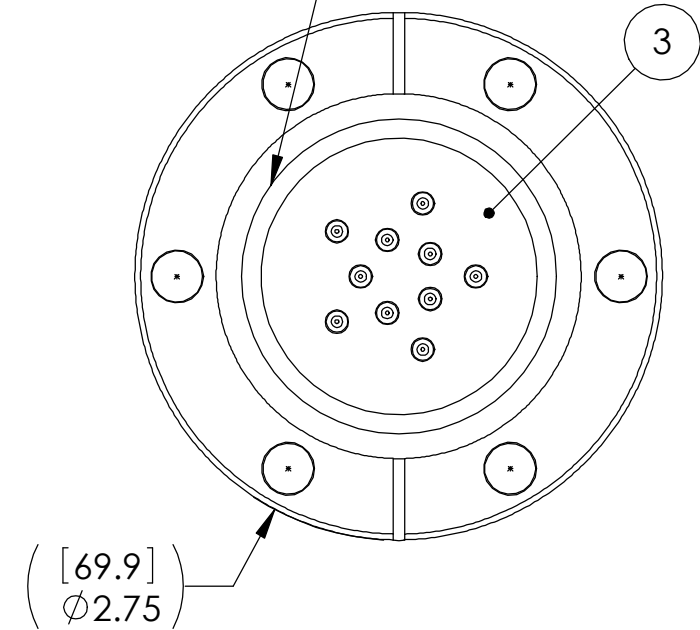

4583	48 [1219]	48 [1219]
4583-1	23.62 [600]	70.87 [1800]
PAVE #	X	Y

NOTES:

1. HE LEAK TEST @ 1 ATM 1X10⁻⁶ CC/SEC OR LESS. A GREEN PAINT DOT INDICATES THE PART HAS PASSED THE TEST. LEAK TEST IS PERFORMED USING A G-275 VITON GASKET.
2. HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE, SHIELD & HOUSING.
3. CONTINUITY TEST <.5Ω SHIELDING END TO END.
4. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
5. ALL PARTS MUST PASS ALL TESTS.
6. WIRE POSITIONING IS APPROXIMATE & VARIABLE.
7. COSMETIC SURFACE VOIDS NOT ON O-RING SEALING SURFACES ARE ACCEPTABLE BASED ON THE SEAL'S DIAMETER:
 <= .5 [12.7] SEAL DIAMETER: Ø .035 [.89] MAX ALLOWED VOID SIZE
 > .5 [12.7] SEAL DIAMETER: Ø .060 [1.5] MAX ALLOWED VOID SIZE
 REF-OPERATING TEMPERATURE -20°C TO 125°C..
8. DIMENSIONS ARE INCHES [millimeters].

4	1	GASKET G-275 C	GASKET COPPER
3	A/R	PAVE-Seal 150	EPOXY BLACK
2	10	RG188-DS	CABLE COAX 0.122 DIA WITH DOUBLE SHIELDED WHITE PTFE JACKET
1	1	1473	HOUSING CF275-SS
ITEM	QTY	PART NUMBER	DESCRIPTION

PAVE technology co.
 2751 Thunderhawk Court
 Dayton, OH 45414-3445
 U.S.A.
 tel (937) 890-1100
 fax (937) 8905165
 www.pavetechnologyco.com

DESCRIPTION
CF275-SS-150-10-RG188DS-X-Y

PART NUMBER
4583

MATERIAL NOTED
 REVISION LEVEL A
 PROJECTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
 X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
 ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS