


RECOMMENDED RETAINING RING
TRUARC N5000-43 OR EQUAL


ADDITIONAL HOUSING DETAILS
(O-RINGS & BACKUP RING REMOVED FOR CLARITY)



NOTES:

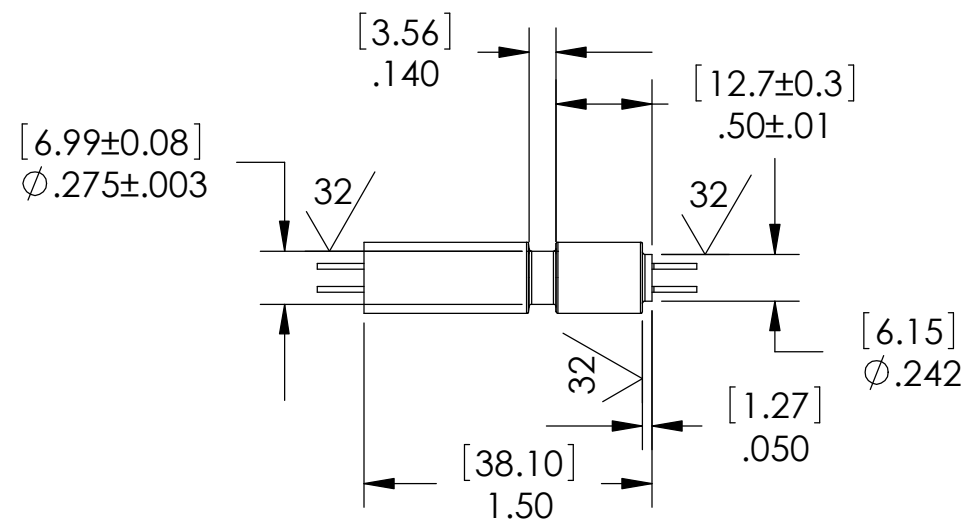

1. LEAK TEST: 100% OF PARTS WILL BE TESTED TO 1,000 PSI, NO N2 BUBBLES 30 SECONDS MINIMUM. SOME PARTS MAY BE TESTED TO 10,000 PSI, NO N2 BUBBLES 30 SECONDS MINIMUM. A GREEN PAINT DOT INDICATES THE PART HAS PASSED THE TEST.
2. CUSTOMER QUALIFICATION TEST: 24,000 PSI BURST.
3. HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE.
4. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
5. ALL PARTS MUST PASS ALL TESTS.
6. NO COSMETIC SURFACE VOIDS ARE ACCEPTABLE ON O-RING SEALING SURFACES, COSMETIC SURFACE VOIDS SMALLER THAN $\phi 0.035$ [0.89] ARE ACCEPTABLE ON ALL OTHER SURFACES.
7. REF-OPERATING TEMPERATURE RANGE -15 °C TO 180 °C.
8. DIMENSIONS ARE INCHES [millimeters].
9. PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

7	A/R	SAC305	SOLDER
6	1	B/U RING -010	BACK UP RING -010 SINGLE TURN PER MS28774
5	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM-BASED
4	2	-010 VITON BRN	O-RING -010 VITON 75
3	1	TZ26 UL WHITE	WIRE 26 TEZFEL UL10086 19/#38
2	1	TZ26 UL BLACK	WIRE 26 TEZFEL UL10086 19/#38
1	A/R	PAVE-Seal 200UL94	EPOXY BLACK HIGH TEMP
ITEM	QTY	PART NUMBER	DESCRIPTION


 2751 Thunderhawk Court
 Dayton, OH 45414-3445
 U.S.A.
 tel (937) 890-1100
 fax (937) 8905165
 www.pavetechnologyco.com

DESCRIPTION
 SP6H-E-200UL94-2-TZ26-44.5-46.5mm

PART NUMBER
4843

MATERIAL NOTED
 REVISION LEVEL E
 PROJECTION  

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
 X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
 ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS