
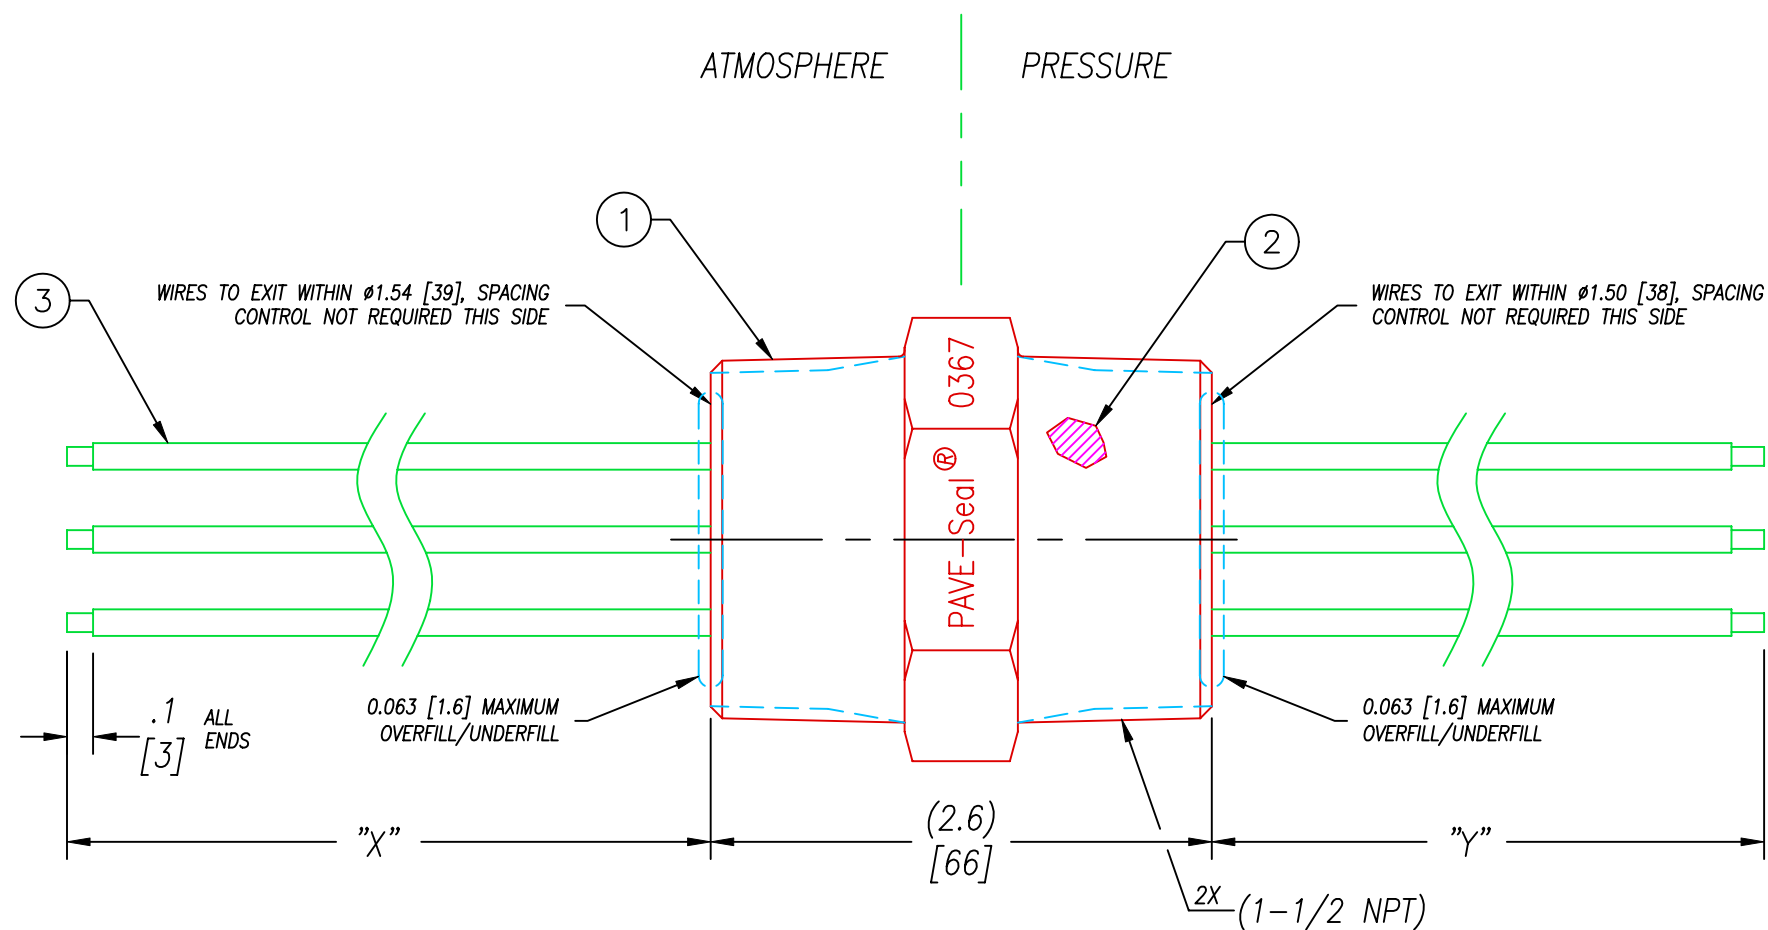


PAVE#	"X"	"Y"	"Z"
0367	100 [2540] ^{+2.00 [50.8]} _{-0.50 [12.7]}	11 [279.4] ^{+1.00 [25.4]} _{-0.25 [6.4]}	4.5
0367-1	72 [1829] MINIMUM	216 [5486] MINIMUM	12

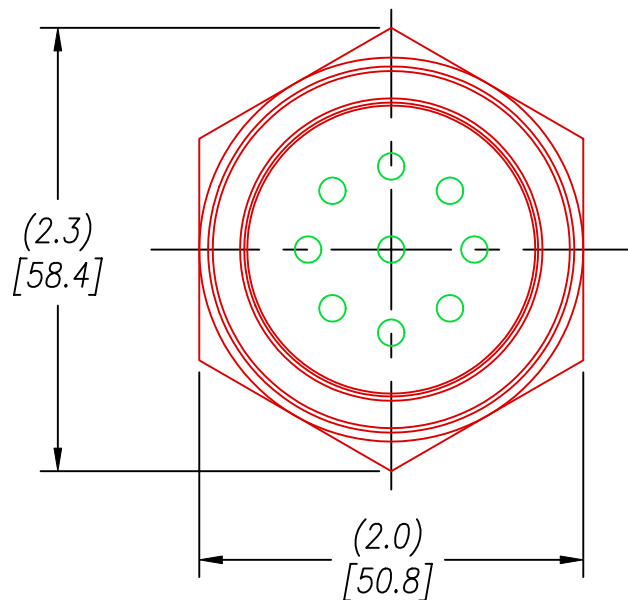

NOTES:

1. LEAK TEST: 80 PSI, NO BUBBLES "Z" MINUTES MINIMUM. A GREEN PAINT DOT INDICATES THE PART HAS PASSED THE TEST.
2. HYPOT 630 VDC 500 MΩ 0.01 SEC MINIMUM, WIRE TO WIRE & HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. COSMETIC SURFACE VOIDS NOT ON O-RING SEALING SURFACES ARE ACCEPTABLE BASED ON THE SEAL'S DIAMETER:
 <= .5 [12.7] SEAL DIAMETER: ø.035 [.89] MAX ALLOWED VOID SIZE
 > .5 [12.7] SEAL DIAMETER: ø.060 [1.5] MAX ALLOWED VOID SIZE
6. REF-OPERATING TEMPERATURE RANGE -20°C TO 125°C.
7. DIMENSIONS ARE INCHES [millimeters].
8. PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

3	9	TZZ10 BLACK	WIRE TZZ10 MIL-W-22759/16-10-0
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	0366	HOUSING PTN24-PS ZINC-PLATED STEEL
ITEM	QTY	PART#	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE +/-0.5
 .X DECIMAL +/- 0.1 .XX DECIMAL +/- 0.02 .XXX DECIMAL +/-0.005
 ANGLES +/- 1 DEG SURFACE FINISH 128 microinch RMS



DESCRIPTION PAVE-Seal® Cable Harnesses
 PTN24-PS-150-9-TZZ10-X-Y

PART NUMBER
 0367

REVISION LEVEL
 K
 PROJECTION