
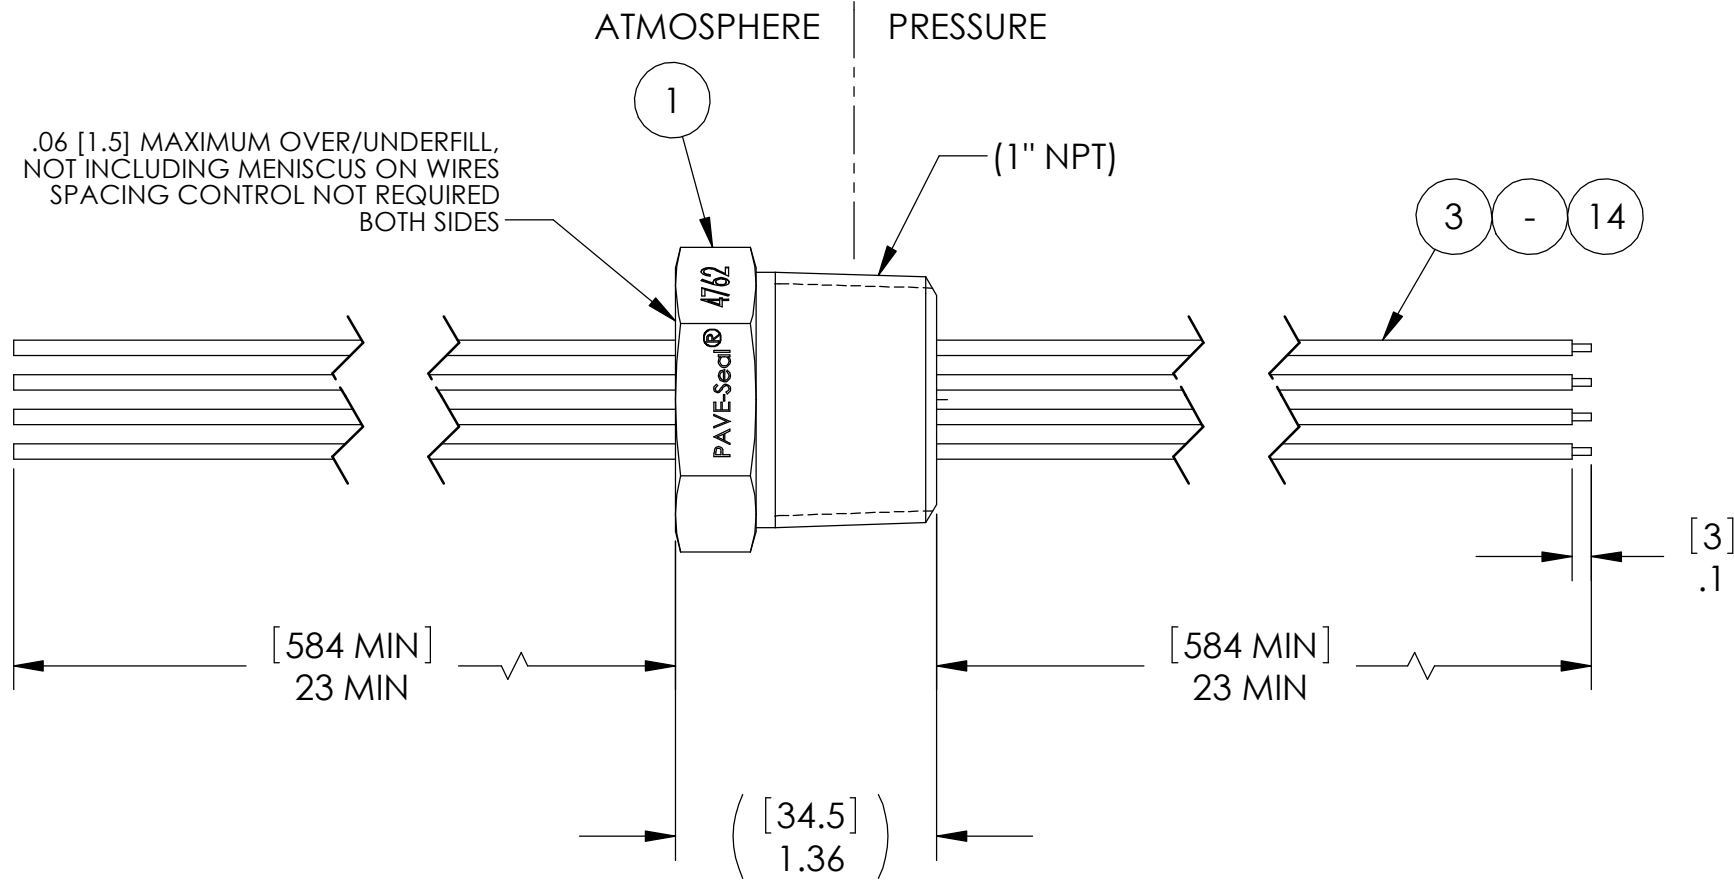



PAVE#	TEST PRESSURE
4762	150 PSI
4762-1	1500 PSI

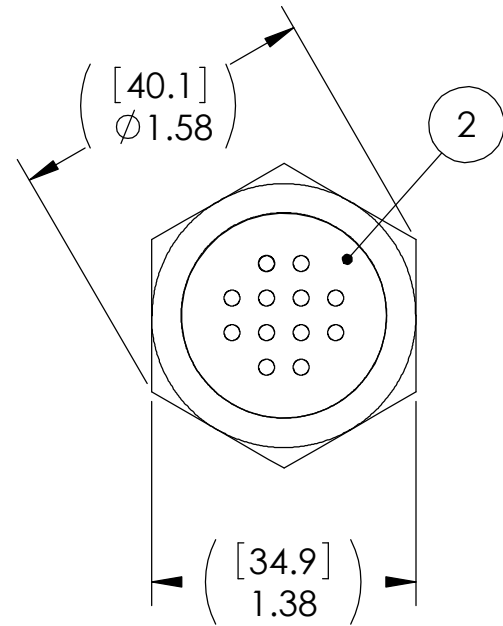

**NOTES:**

- LEAK TEST: TEST PRESSURE PER TABLE, NO N2 BUBBLES 1 MINUTE MINIMUM. A GREEN PAINT DOT INDICATES THE PART HAS PASSED THE TEST.
- HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND HOUSING.
- ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
- ALL PARTS MUST PASS ALL TESTS.
- WIRE POSITIONING IS APPROXIMATE & COLOR POSITIONS ARE VARIABLE.
- COSMETIC SURFACE VOIDS NOT ON O-RING SEALING SURFACES ARE ACCEPTABLE BASED ON THE SEAL'S DIAMETER:  
 <= .5 [12.7] SEAL DIAMETER: Ø .035 [.89] MAX ALLOWED VOID SIZE  
 > .5 [12.7] SEAL DIAMETER: Ø .060 [1.5] MAX ALLOWED VOID SIZE
- REF-OPERATING TEMPERATURE RANGE -20 °C TO 125 °C.
- DIMENSIONS ARE INCHES [millimeters].
- PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

14	1	EE18 UL1180 R/W	WIRE 18EE UL1180 .014 7/#26
13	1	EE18 UL1180 B/W	WIRE 18EE UL1180 .014 7/#26
12	1	EE18 UL1180 YEL	WIRE 18EE UL1180 .014 7/#26
11	1	EE18 UL1180 WHT	WIRE 18EE UL1180 .014 7/#26
10	1	EE18 UL1180 VIO	WIRE 18EE UL1180 .014 7/#26
9	1	EE18 UL1180 RED	WIRE 18EE UL1180 .014 7/#26
8	1	EE18 UL1180 ORG	WIRE 18EE UL1180 .014 7/#26
7	1	EE18 UL1180 GRY	WIRE 18EE UL1180 .014 7/#26
6	1	EE18 UL1180 GRN	WIRE 18EE UL1180 .014 7/#26
5	1	EE18 UL1180 BR	WIRE 18EE UL1180 .014 7/#26
4	1	EE18 UL1180 BLU	WIRE 18EE UL1180 .014 7/#26
3	1	EE18 UL1180 BLK	WIRE 18EE UL1180 .014 7/#26
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	4191	HOUSING PT16-SS
ITEM	QTY	PART NUMBER	DESCRIPTION


 2751 Thunderhawk Court  
 Dayton, OH 45414-3445  
 U.S.A.  
 tel (937) 890-1100  
 fax (937) 8905165  
 www.pavetechnologyco.com

DESCRIPTION  
 PT16-SS-150-12-TEE18-23-23

PART NUMBER \*SEE TABLE MATERIAL NOTED  
**4762\***

REVISION LEVEL A PROJECTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5  
 X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005  
 ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS