


PAVE #	ITEM 3	ITEM 3 DESCRIPTION	X	Y	PAVE DESCRIPTION
3285	TT24	CABLE T/C TYPE T#24 TEFLON	120 [3048]	40 [1016]	PT8-SS-200-8P-TT24-120-40
3285-1	TT24	CABLE T/C TYPE T#24 TEFLON	96 [2438]	96 [2438]	PT8-SS-200-8P-TT24-96-96
3285-K	KT24	CABLE T/C TYPE K 24AWG TEFLON	120 [3048]	40 [1016]	PT8-SS-200-8P-KT24-120-40

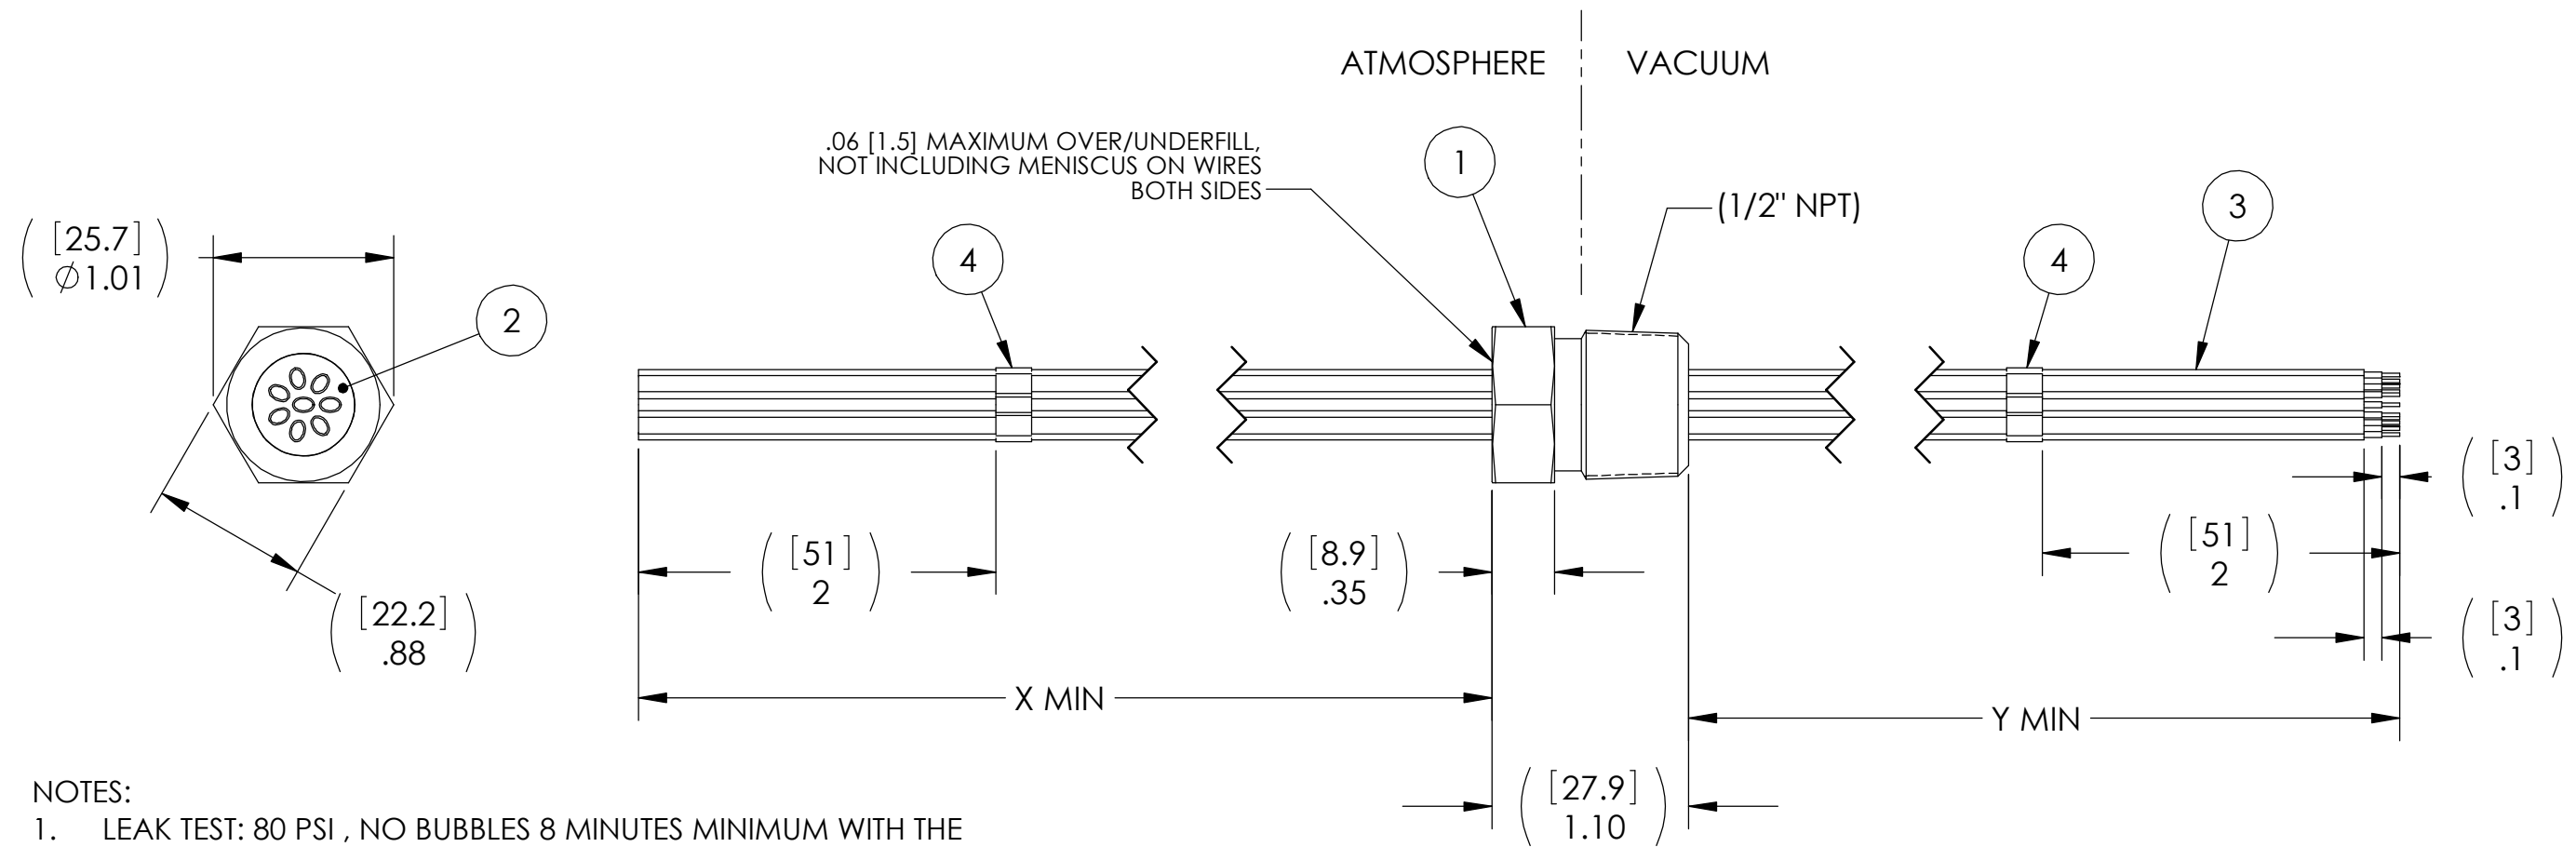

NOTES:

- LEAK TEST: 80 PSI , NO BUBBLES 8 MINUTES MINIMUM WITH THE PRESSURE APPLIED TO THE VACUUM SIDE OF HOUSING. A GREEN PAINT DOT INDICATES THE PART HAS PASSED THE TEST.
- HYPOT 630 VDC 50 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND HOUSING.
- ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
- ALL PARTS MUST PASS ALL TESTS.
- WIRE POSITIONING IS APPROXIMATE & VARIABLE.
- COSMETIC SURFACE VOIDS NOT ON O-RING SEALING SURFACES ARE ACCEPTABLE BASED ON THE SEAL'S DIAMETER:  
 <= .5 [12.7] SEAL DIAMETER:  $\phi$ .035 [.89] MAX ALLOWED VOID SIZE  
 > .5 [12.7] SEAL DIAMETER:  $\phi$ 0.060 [1.5] MAX ALLOWED VOID SIZE
- REF-OPERATING TEMPERATURE -40 °C TO 150 °C.
- DIMENSIONS ARE INCHES [millimeters].
- PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

4	16	BRADY MARKERS	BRADY MARKERS 1-8
3	8	SEE TABLE	SEE TABLE
2	A/R	PAVE-Seal 200	EPOXY BLACK
1	1	0346-1	HOUSING PT-8 SS
ITEM	QTY	PART NUMBER	DESCRIPTION

**PAVE technology co.**

2751 Thunderhawk Court  
Dayton, OH 45414-3445  
U.S.A.  
tel (937) 890-1100  
fax (937) 8905165  
www.pavetechnologyco.com

DESCRIPTION  
SEE TABLE

PART NUMBER \*SEE TABLE  
**3285\***

MATERIAL NOTED

REVISION LEVEL H

PROJECTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE  $\pm$ 0.5  
 X.X DECIMAL  $\pm$ 0.1 X.XX DECIMAL  $\pm$ 0.02 X.XXX DECIMAL  $\pm$ 0.005  
 ANGLES  $\pm$ 1 DEGREE SURFACE FINISH 128 microinch RMS