


PIN-OUT	
POS	COLOR
1	WHITE
2	W/RED
3	YLW
4	NOT USED
5	NOT USED
6	W/GRN
7	GREEN
8	NOT USED
9	GRAY
10	NOT USED
11	W/BLK
12	RED
13	BLUE
14	ORG
15	W/RED+GREY
16	BLK
17	VIO
18	BRN

.06 [1.5] MAXIMUM OVER/UNDERFILL, NOT INCLUDING MENISCUS ON WIRES
NO URETHANE COLLAR, SEE NOTE 7.

2328-1 ONLY
SCALE: 2:3

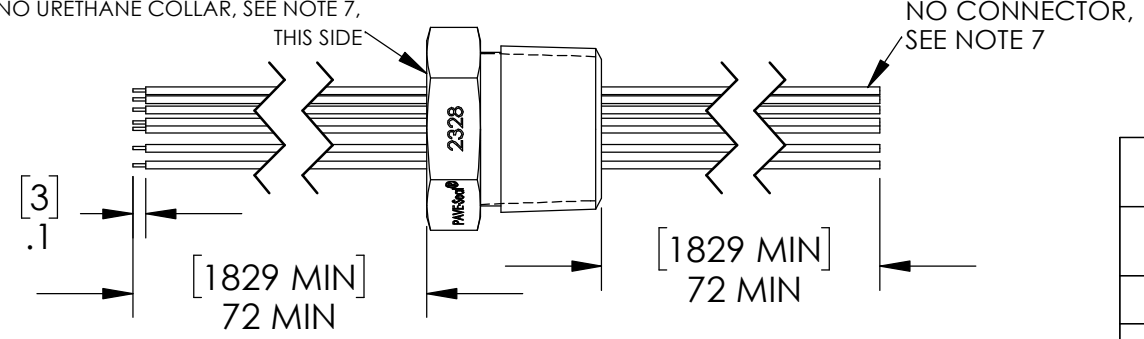

ITEM	QTY	PART NUMBER	DESCRIPTION
18	1	13280-18SG-326	CONNECTOR MAXI-CON-X CABLE 18-#20 SOCS
17	A/R	URETHANE	URETHANE BLACK
16	1	EE22 MIL W/RED	WIRE 22EE MIL-W-16878/5 .015 7/#30
15	1	EE22 MIL W/GRN	WIRE 22EE MIL-W-16878/5 .015 7/#30
14	1	EE22 MIL W/BLK	WIRE 22EE MIL-W-16878/5 .015 7/#30
13	1	EE22 MIL W/RED+GREY	WIRE 22EE MIL-W-16878/5 .015 7/#30
12	1	EE22 MIL YLW	WIRE 22EE MIL-W-16878/5 .015 7/#30
11	1	EE22 MIL WHITE	WIRE 22EE MIL-W-16878/5 .015 7/#30
10	1	EE22 MIL VIO	WIRE 22EE MIL-W-16878/5 .015 7/#30
9	1	EE22 MIL RED	WIRE 22EE MIL-W-16878/5 .015 7/#30
8	1	EE22 MIL ORG	WIRE 22EE MIL-W-16878/5 .015 7/#30
7	1	EE22 MIL GREEN	WIRE 22EE MIL-W-16878/5 .015 7/#30
6	1	EE22 MIL GRAY	WIRE 22EE MIL-W-16878/5 .015 7/#30
5	1	EE22 MIL BRN	WIRE 22EE MIL-W-16878/5 .015 7/#30
4	1	EE22 MIL BLUE	WIRE 22EE MIL-W-16878/5 .015 7/#30
3	1	EE22 MIL BLK	WIRE 22EE MIL-W-16878/5 .015 7/#30
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	1625	HOUSING PT16-SS

NOTES:

- LEAK TEST: 80 PSI, NO BUBBLES 6 MINUTES MINIMUM. A GREEN PAINT DOT ON THE ATMOSPHERE SIDE INDICATES THE PART HAS PASSED THE TEST.
- HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND HOUSING.
- ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
- ALL PARTS MUST PASS ALL TESTS.
- WIRES ARE NOT REQUIRED TO BEND SHARPLY AT EPOXY SEAL SURFACE.
- 2328 ONLY: CONTINUITY TEST <0.22 OHM WIRE END TO SOCKET WITH MATING CONNECTOR.
- 2328-1 ONLY: DOES NOT INCLUDE URETHANE COLLAR (ITEM 17) OR CABLE CONNECTOR (ITEM 18), REF-2328-1 VIEW.
- COSMETIC SURFACE VOIDS NOT ON O-RING SEALING SURFACES ARE ACCEPTABLE BASED ON THE SEAL'S DIAMETER:
<= .5 [12.7] SEAL DIAMETER: Ø.035 [.89] MAX ALLOWED VOID SIZE
> .5 [12.7] SEAL DIAMETER: Ø.060 [1.5] MAX ALLOWED VOID SIZE
- REF-OPERATING TEMPERATURE RANGE -20°C TO 125°C.
- DIMENSIONS ARE INCHES [millimeters].
- PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

PAVE technology co.
 2751 Thunderhawk Court
 Dayton, OH 45414-3445
 U.S.A.
 tel (937) 890-1100
 fax (937) 8905165
 www.pavetechnologyco.com

DESCRIPTION
PT16-SS-150-14-TEE22-72-72

PART NUMBER *SEE NOTE 7
2328*

MATERIAL NOTED

REVISION LEVEL C

PROJECTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
 X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
 ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS