


PAVE#	PAVE DESCRIPTION	ITEM 3	ITEM 3 DESCRIPTION	PRESSURE	MINIMUM TIME
4360	PT12-SS-200-8P-JT20-36-72	JT20	CABLE T/C TYPE J 20AWG TEFLON	80 PSI	5 MINUTES
4360-K	PT12-SS-200-8P-KT20-36-72	KT20	CABLE T/C TYPE K 20AWG TEFLON	300 PSI (N2)	2 MINUTES

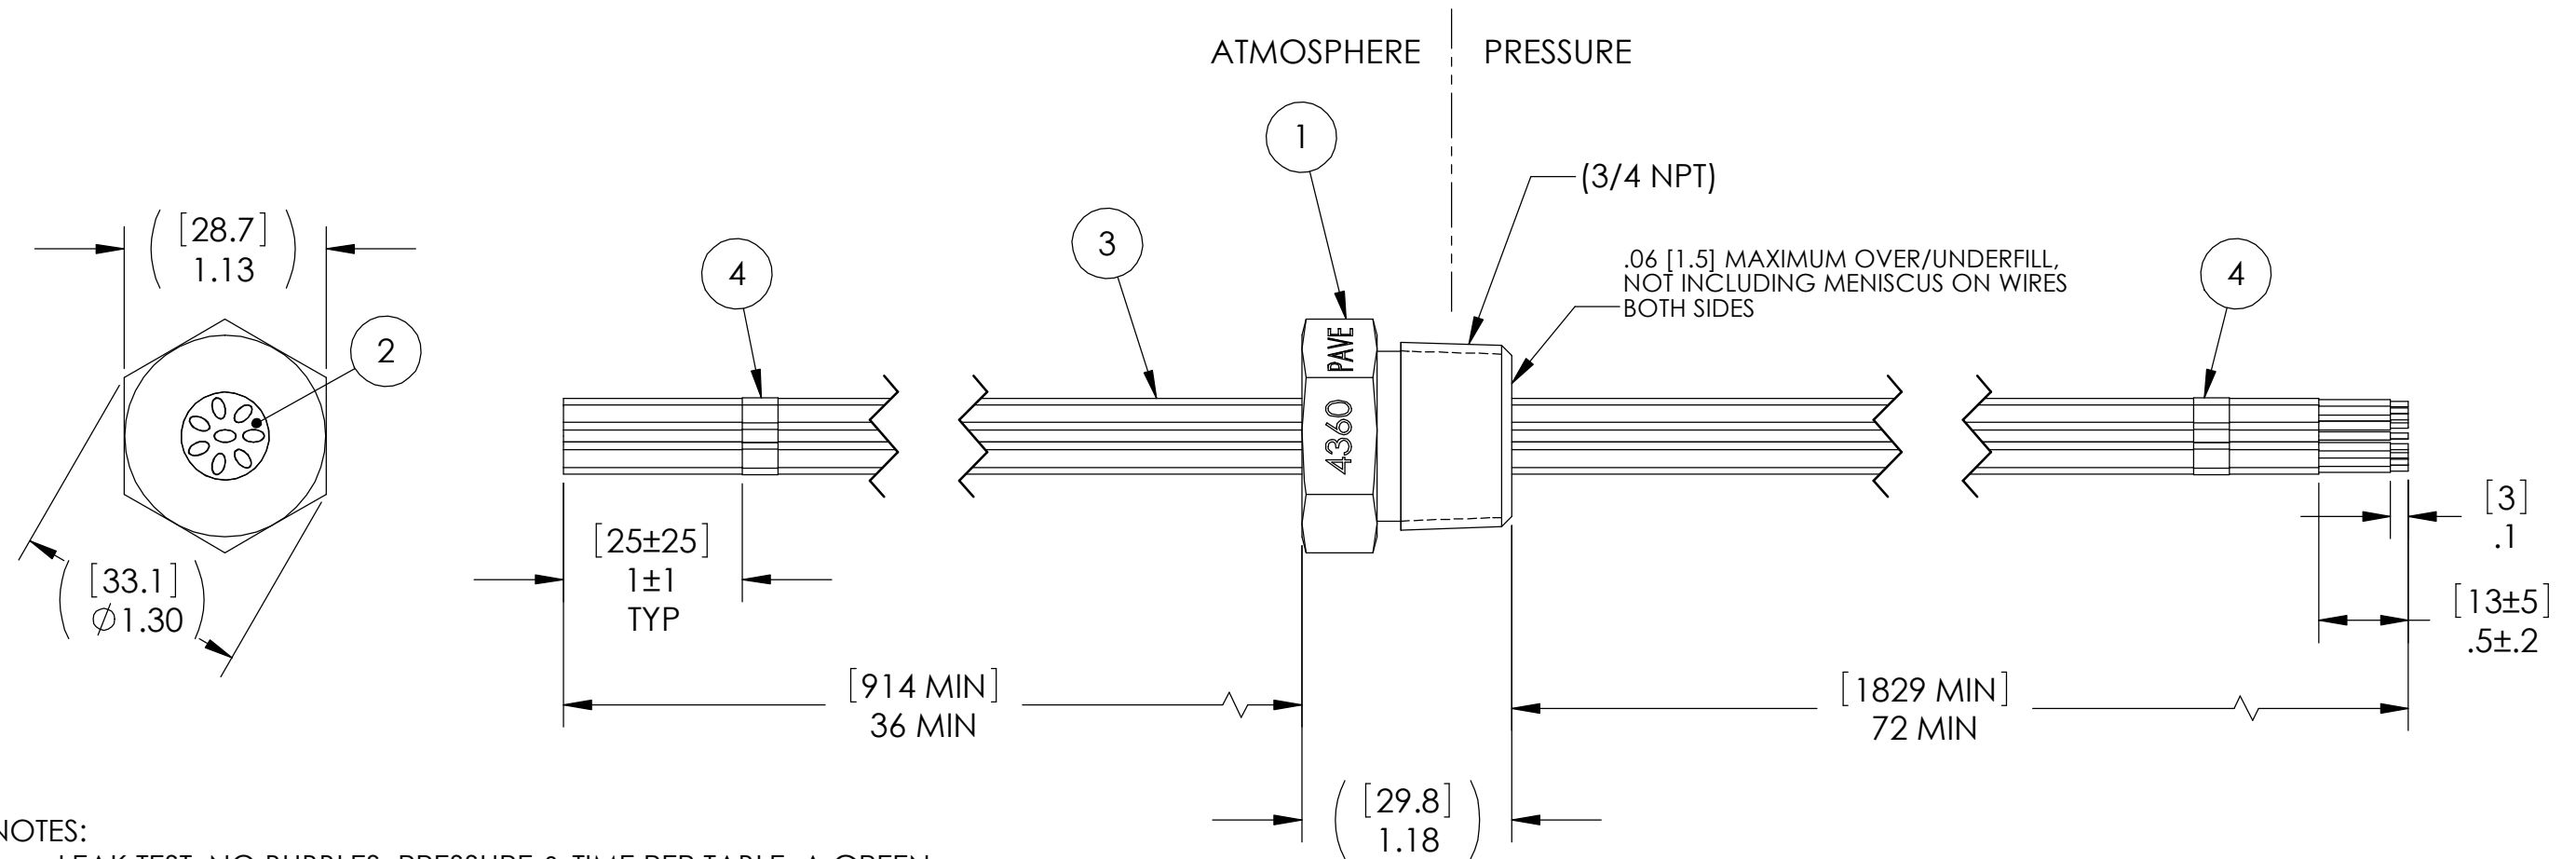

NOTES:

1. LEAK TEST: NO BUBBLES, PRESSURE & TIME PER TABLE. A GREEN PAINT DOT ON THE ATMOSPHERE SIDE INDICATES THE PART HAS PASSED THE TEST.
2. HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. WIRE POSITIONING IS APPROXIMATE & VARIABLE, WIRES ARE NOT REQUIRED TO BEND SHARPLY AT EPOXY SEAL SURFACE.
6. COSMETIC SURFACE VOIDS NOT ON O-RING SEALING SURFACES ARE ACCEPTABLE BASED ON THE SEAL'S DIAMETER:
 <= .5 [12.7] SEAL DIAMETER: Ø.035 [.89] MAX ALLOWED VOID SIZE
 > .5 [12.7] SEAL DIAMETER: Ø.060 [1.5] MAX ALLOWED VOID SIZE
7. REF-OPERATING TEMPERATURE RANGE -20°C TO 150°C.
8. PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.
9. DIMENSIONS ARE INCHES [millimeters].

ITEM	QTY	PART #	DESCRIPTION
4	16	-	BRADY WIRE MARKERS (1-8)
3	8	SEE TABLE	SEE TABLE
2	A/R	PAVE-Seal 200	EPOXY BLACK
1	1	3297	HOUSING PT12-SS

PAVE technology co.

2751 Thunderhawk Court
Dayton, OH 45414-3445
U.S.A.
tel (937) 890-1100
fax (937) 8905165
www.pavetechnologyco.com

DESCRIPTION
SEE TABLE

PART NUMBER
4360

MATERIAL NOTED

REVISION LEVEL
A

PROJECTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
 X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
 ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS