




PAVE#	TEST PRESSURE	TEMP. RANGE
4762	150 PSI	-20°C TO 125°C
4762-1	1500 PSI	-20°C TO 125°C
4762-2	450 PSI	-55°C TO 130°C

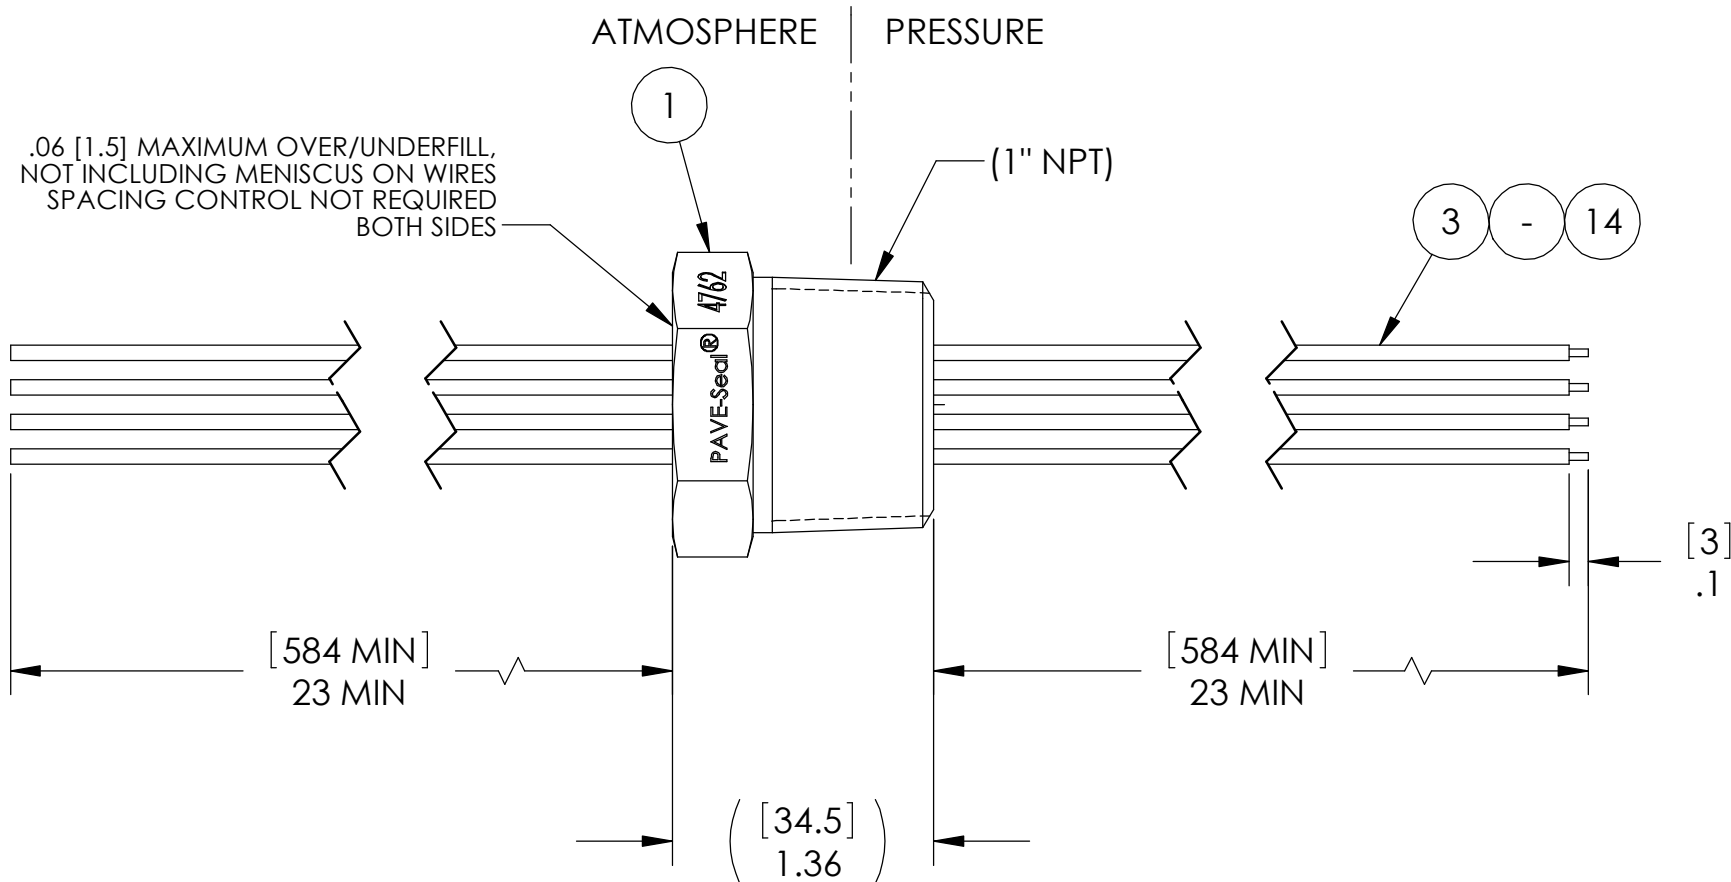

NOTES:

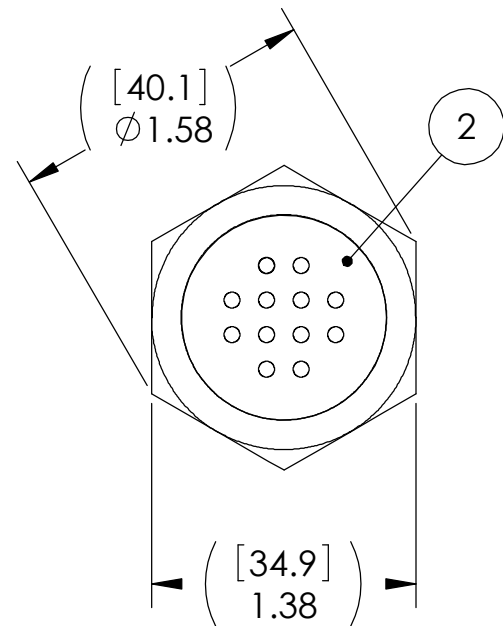

- LEAK TEST: TEST PRESSURE PER TABLE, NO N2 BUBBLES 1 MINUTE MINIMUM. A GREEN PAINT DOT INDICATES THE PART HAS PASSED THE TEST.
- HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND HOUSING.
- ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
- ALL PARTS MUST PASS ALL TESTS.
- WIRE POSITIONING IS APPROXIMATE & COLOR POSITIONS ARE VARIABLE.
- COSMETIC SURFACE VOIDS NOT ON O-RING SEALING SURFACES ARE ACCEPTABLE BASED ON THE SEAL'S DIAMETER:
 <= .5 [12.7] SEAL DIAMETER: ϕ .035 [.89] MAX ALLOWED VOID SIZE
 > .5 [12.7] SEAL DIAMETER: ϕ .060 [1.5] MAX ALLOWED VOID SIZE
- REF-OPERATING TEMPERATURE RANGE PER TABLE.
- DIMENSIONS ARE INCHES [millimeters].
- PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

14	1	EE18 UL1180 R/W	WIRE 18EE UL1180 .014 7/#26
13	1	EE18 UL1180 B/W	WIRE 18EE UL1180 .014 7/#26
12	1	EE18 UL1180 YEL	WIRE 18EE UL1180 .014 7/#26
11	1	EE18 UL1180 WHT	WIRE 18EE UL1180 .014 7/#26
10	1	EE18 UL1180 VIO	WIRE 18EE UL1180 .014 7/#26
9	1	EE18 UL1180 RED	WIRE 18EE UL1180 .014 7/#26
8	1	EE18 UL1180 ORG	WIRE 18EE UL1180 .014 7/#26
7	1	EE18 UL1180 GRY	WIRE 18EE UL1180 .014 7/#26
6	1	EE18 UL1180 GRN	WIRE 18EE UL1180 .014 7/#26
5	1	EE18 UL1180 BR	WIRE 18EE UL1180 .014 7/#26
4	1	EE18 UL1180 BLU	WIRE 18EE UL1180 .014 7/#26
3	1	EE18 UL1180 BLK	WIRE 18EE UL1180 .014 7/#26
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	4191	HOUSING PT16-SS
ITEM	QTY	PART NUMBER	DESCRIPTION


 2751 Thunderhawk Court
 Dayton, OH 45414-3445
 U.S.A.
 tel (937) 890-1100
 fax (937) 8905165
 www.pavetechnologyco.com

DESCRIPTION
 PT16-SS-150-12-TEE18-23-23

PART NUMBER *SEE TABLE
4762*

MATERIAL NOTED
 REVISION LEVEL B
 PROJECTION  

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ± 0.5
 X.X DECIMAL ± 0.1 X.XX DECIMAL ± 0.02 X.XXX DECIMAL ± 0.005
 ANGLES ± 1 DEGREE SURFACE FINISH 128 microinch RMS