
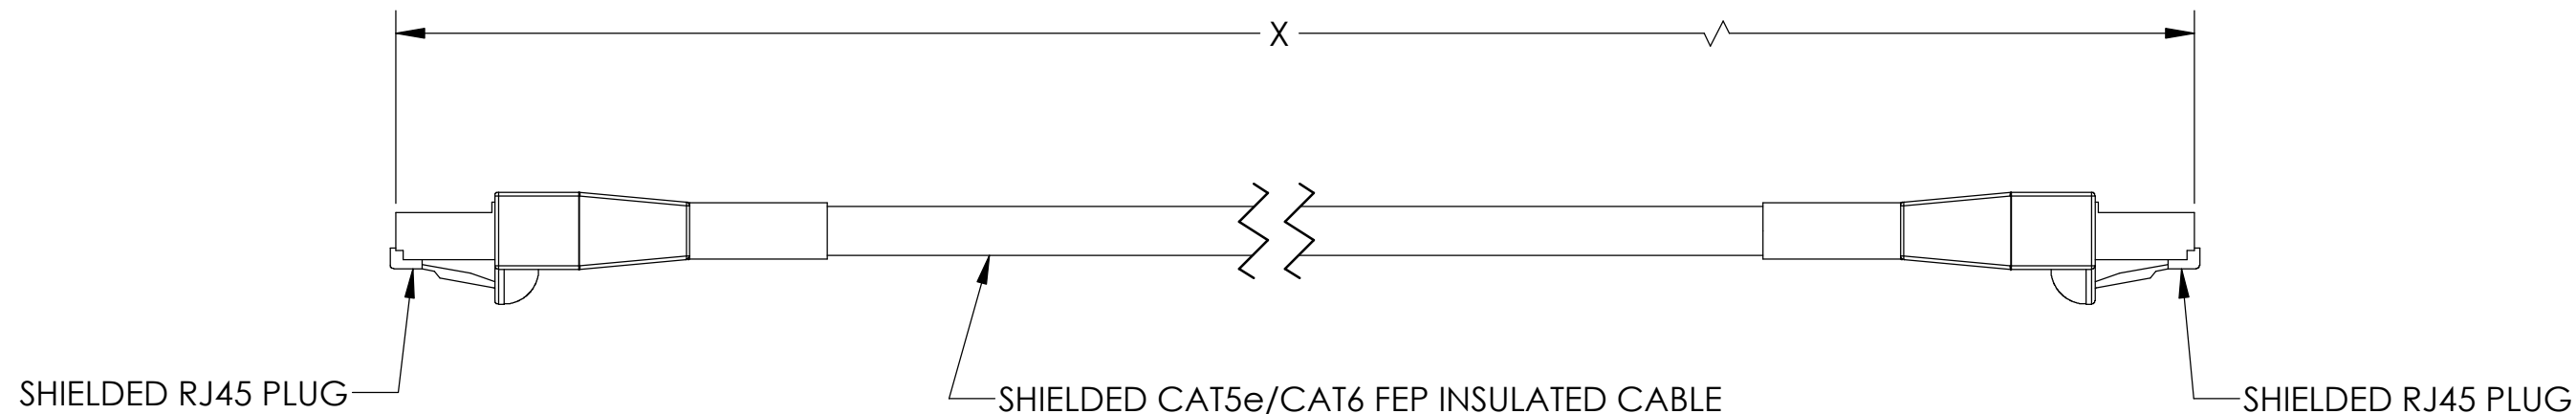


PAVE#	X
5546	$\begin{bmatrix} 2134^{+76} \\ 0 \end{bmatrix}$ 84^{+3}_{-0}
5546-1	$\begin{bmatrix} 6096^{+229} \\ 0 \end{bmatrix}$ 240^{+9}_{-0}



NOTE: RJ45 WIRING CONFIGURATION PER TIA/EIA 568A

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS

		2751 Thunderhawk Court Dayton, OH 45414-3445 U.S.A. tel (937) 890-1100 fax (937) 8905165 www.pavetechnologyco.com	
		DESCRIPTION CABLE ASSEMBLY SHIELDED CAT 5e/CAT 6 FEP JACKET/ INSULATION TERMINATED WITH SHIELDED CAT 5e/CAT 6 RJ45 PLUGS	PART NUMBER 5546*
PROJECTION 