


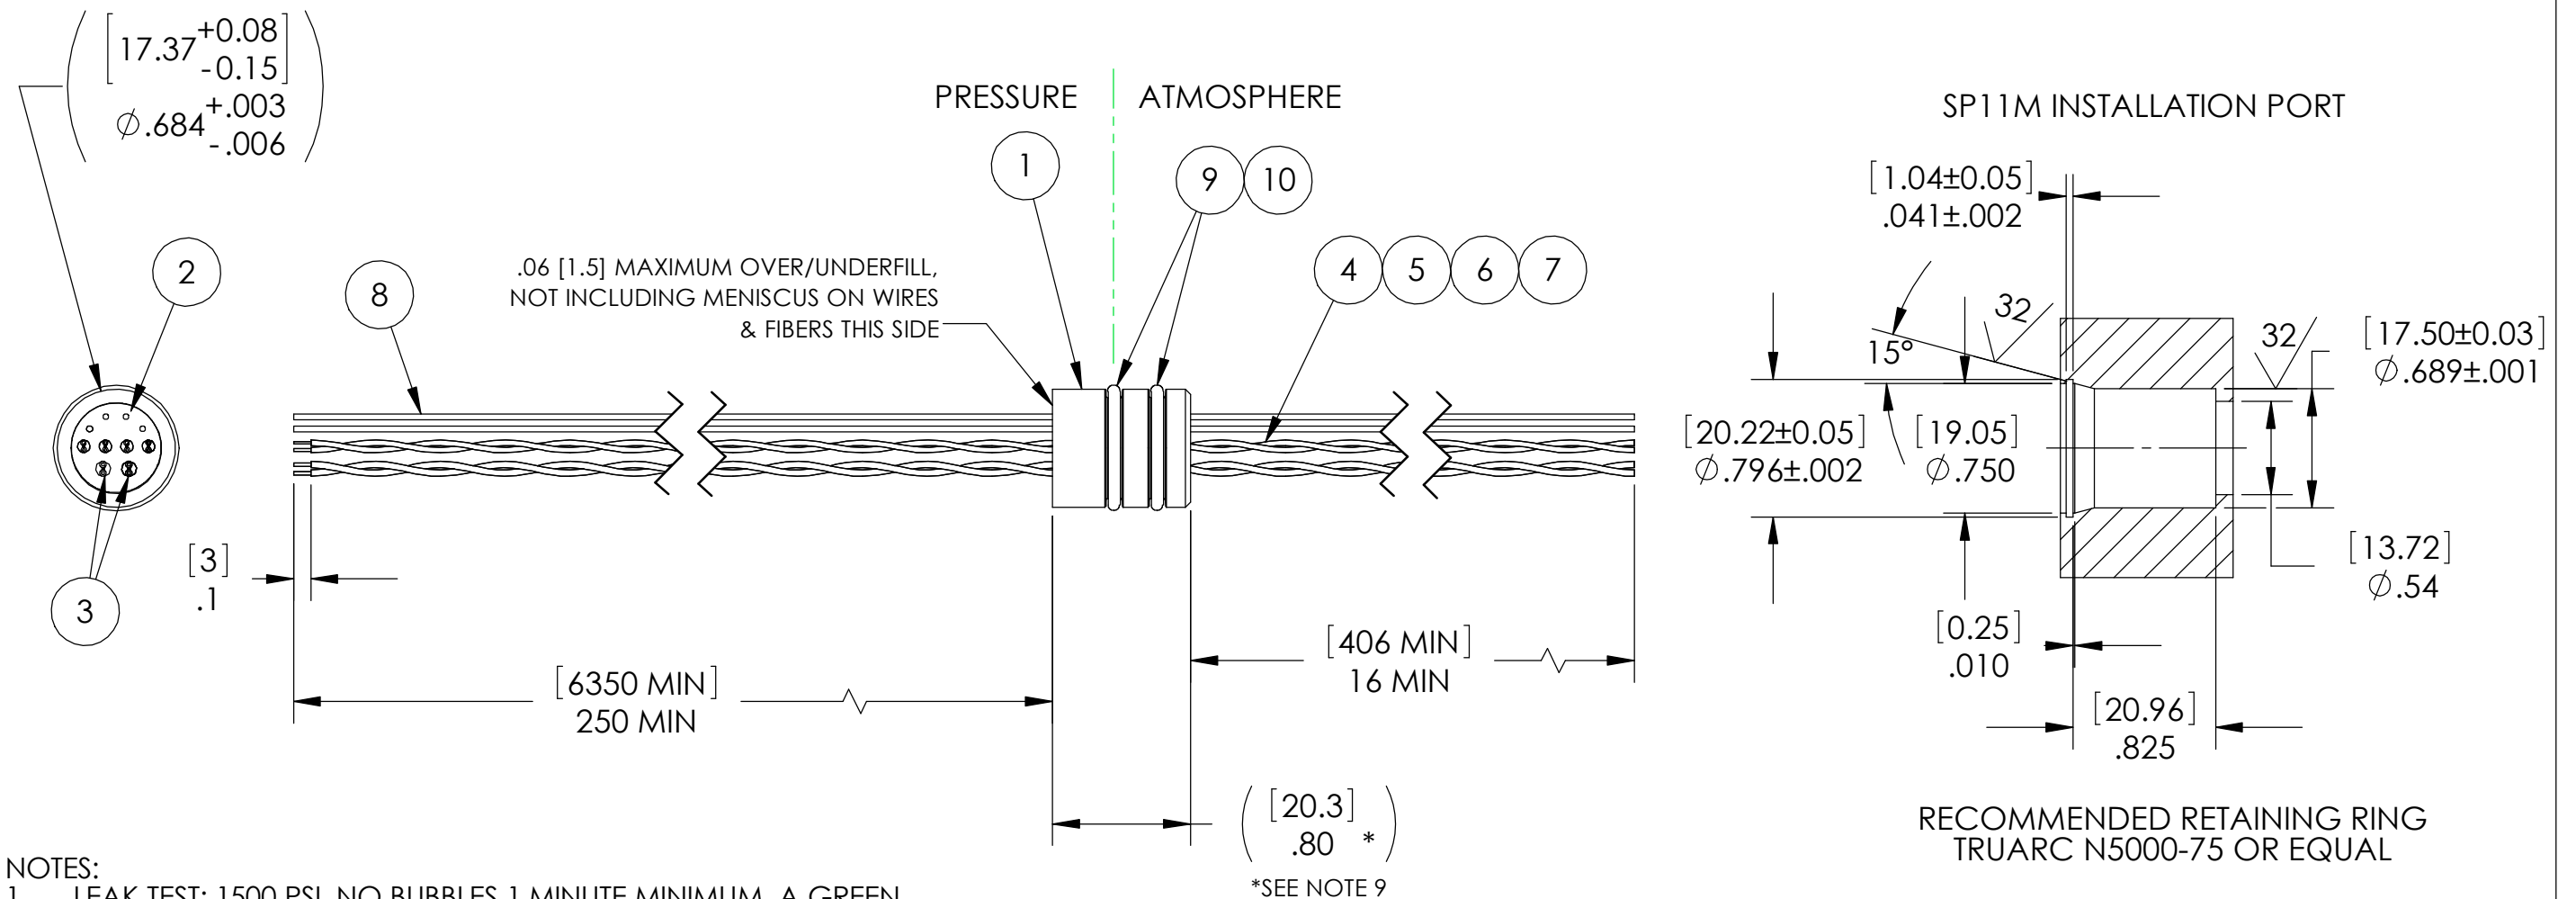

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ± 0.5
X.X DECIMAL ± 0.1 X.XX DECIMAL ± 0.02 X.XXX DECIMAL ± 0.005
ANGLES ± 1 DEGREE SURFACE FINISH 128 microinch RMS

10	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM-BASED
9	2	-015 N0674-70	O-RING -015 NBR 70
8	SEE NOTE 3 4	128332	FIBER OPTIC MULTIMODE OM4 50/125/500/900 AQUA HARD ELASTOMERIC BUFFER
7	1	55A0421-26-9/92	WIRE TZ26 19/#38 TPC TWST PR WHT & WHT/RED STRIPE
6	1	55A0421-26-9/93	WIRE TZ26 19/#38 TPC TWST PR WHT & WHT/ORANGE STRIPE
5	1	55A0421-26-9/95	WIRE TZ26 19/#38 TPC TWST PR WHT & WHT/GREEN STRIPE
4	1	55A0421-26-9-96	WIRE TZ26 19/#38 TPC TWST PR WHT & WHT/BLUE STRIPE
3	1	FRCL-122111	CABLE CAT 6 UNJACKETED NO SHIELD (ONLY 2 TWISTED PAIRS OF 4 USED, BLU/WHT W/BLU STRIPE & ORG/WHT W/ORG STRIPE)
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	1374M	HOUSING SP11M-E
ITEM	QTY	PART NUMBER	DESCRIPTION

PAVE technology co. 2751 Thunderhawk Court Dayton, OH 45414-3445 U.S.A. tel (937) 890-1100 fax (937) 8905165 www.pavetechnologyco.com	
DESCRIPTION SP11M-E-150-2TPT/4TP/3-CAT6/TZ26/MMFO-250-16	
PART NUMBER 5623	MATERIAL NOTED REVISION LEVEL A PROJECTION