
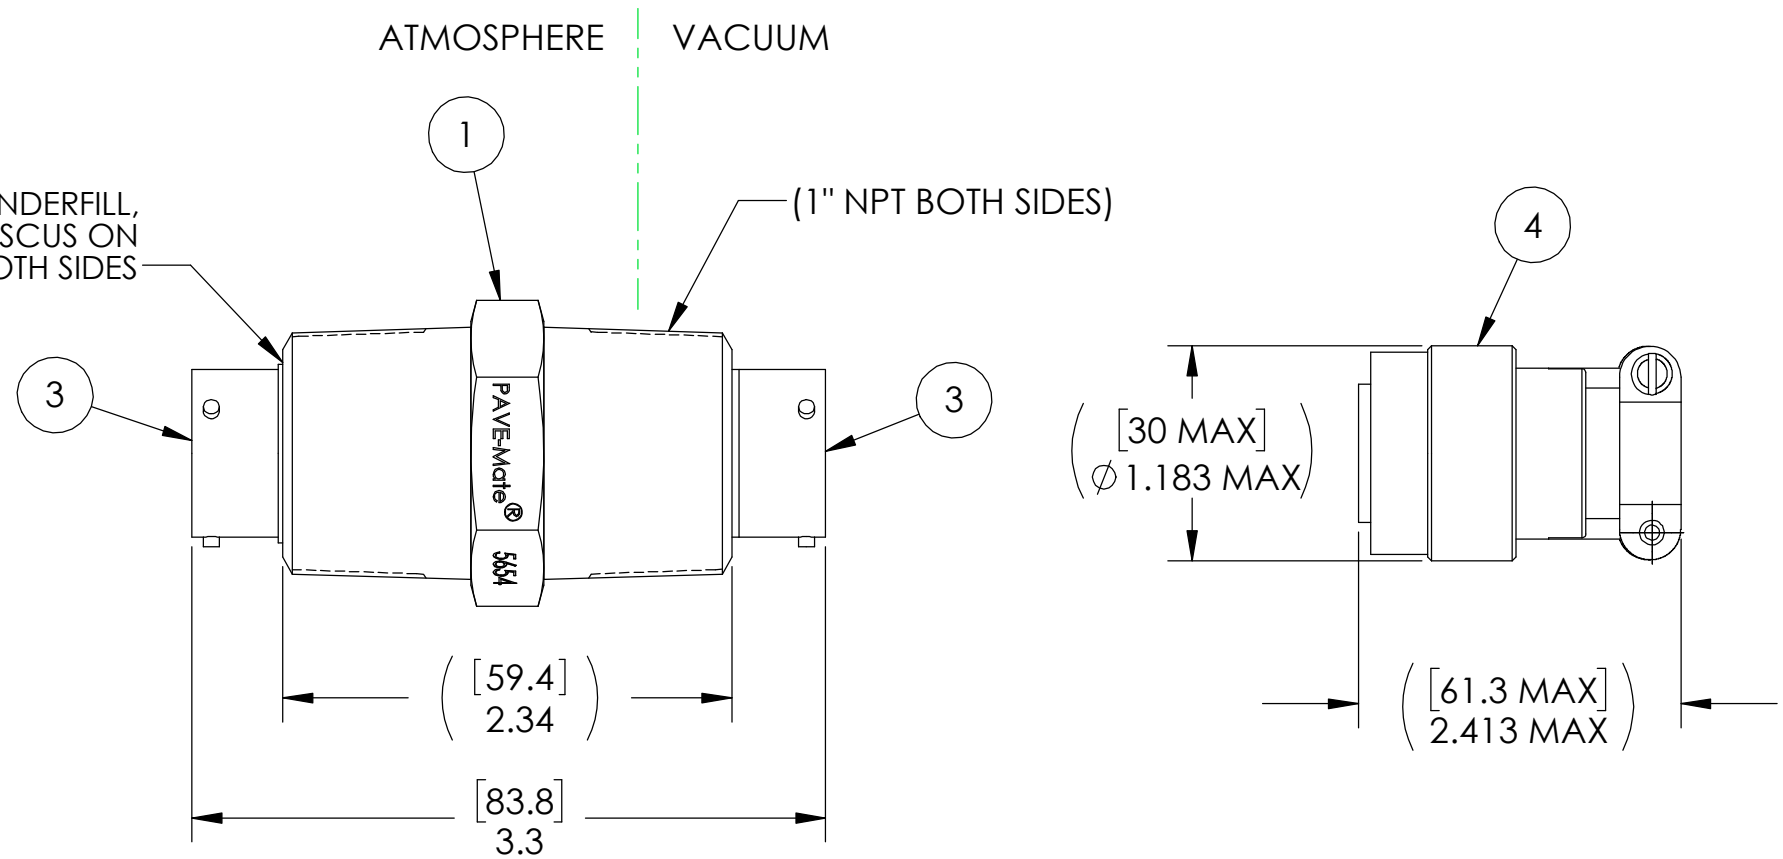


.06 [1.5] MAXIMUM OVER/UNDERFILL, NOT INCLUDING MENISCUS ON CONNECTORS BOTH SIDES

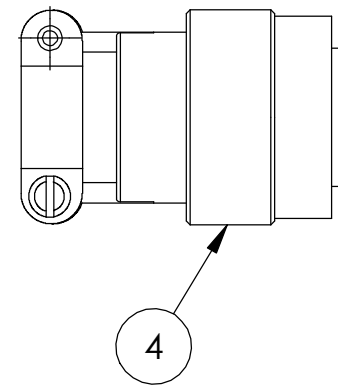

NOTES:

1. HE LEAK TEST @ 1 ATM. 1X10<sup>-6</sup> CC/SEC OR LESS. A GREEN PAINT DOT ON THE ATMOSPHERE SIDE INDICATES THE PART HAS PASSED THE TEST.
2. HYPOT 1000 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM PIN TO PIN AND HOUSING WITH MATING CONNECTORS.
3. CONTINUITY TEST <0.5 OHM SOCKET TO SOCKET WITH MATING CONNECTORS.
4. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
5. ALL PARTS MUST PASS ALL TESTS.
6. COSMETIC SURFACE VOIDS NOT ON O-RING SEALING SURFACES ARE ACCEPTABLE BASED ON THE SEAL'S DIAMETER:  
 <= .5 [12.7] SEAL DIAMETER: Ø .035 [.89] MAX ALLOWED VOID SIZE  
 > .5 [12.7] SEAL DIAMETER: Ø .060 [1.5] MAX ALLOWED VOID SIZE
7. REF-OPERATING TEMPERATURE RANGE -196°C TO 125°C.
8. DIMENSIONS ARE INCHES [millimeters].
9. PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

PIN-OUT TABLE	
ATM	VAC
A	H
B	G
C	F
D	E
E	D
F	C
G	B
H	A
J	J
K	M
L	L
M	K

ITEM	QTY	PART NUMBER	DESCRIPTION
4	2	SC3126F14-12P	PLUG 4#16/8#20 GOLD PLATED COPPER ALLOY CRIMP PINS NICKEL PLATED ALUMINUM SHELL W/ STRAIN RELIEF
3	2	SC3112E14-12S	RCPT 4#16/8#20 GOLD PLATED COPPER ALLOY SOCKETS, NEOPRENE INSERT, NICKEL PLATED ALUMINUM SHELL
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	1132-2	HOUSING PTN16-SS

2751 Thunderhawk Court  
Dayton, OH 45414-3445  
U.S.A.  
tel (937) 890-1100  
fax (937) 8905165  
www.pavetechnologyco.com

**PAVE technology co.**

DESCRIPTION  
PTN16-SS-150-4/8-16/20-3112SS

PART NUMBER  
**5654**

MATERIAL NOTED

REVISION LEVEL -

PROJECTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.  
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5  
 X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005  
 ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS