


PAVE #	ITEM 3	ITEM 3 DESCRIPTION	X	Y	PAVE DESCRIPTION	A	B
3285	TT24	CABLE T/C TYPE T#24 TEFLON	120 [3048]	40 [1016]	PT8-SS-200-8P-TT24-120-40	80	8
3285-1	TT24	CABLE T/C TYPE T#24 TEFLON	96 [2438]	96 [2438]	PT8-SS-200-8P-TT24-96-96	80	8
3285-2	TT24	CABLE T/C TYPE T#24 TEFLON	36 [914]	36 [914]	PT8-SS-200-8P-TT24-36-36	500	1
3285-K	KT24	CABLE T/C TYPE K 24AWG TEFLON	120 [3048]	40 [1016]	PT8-SS-200-8P-KT24-120-40	80	8

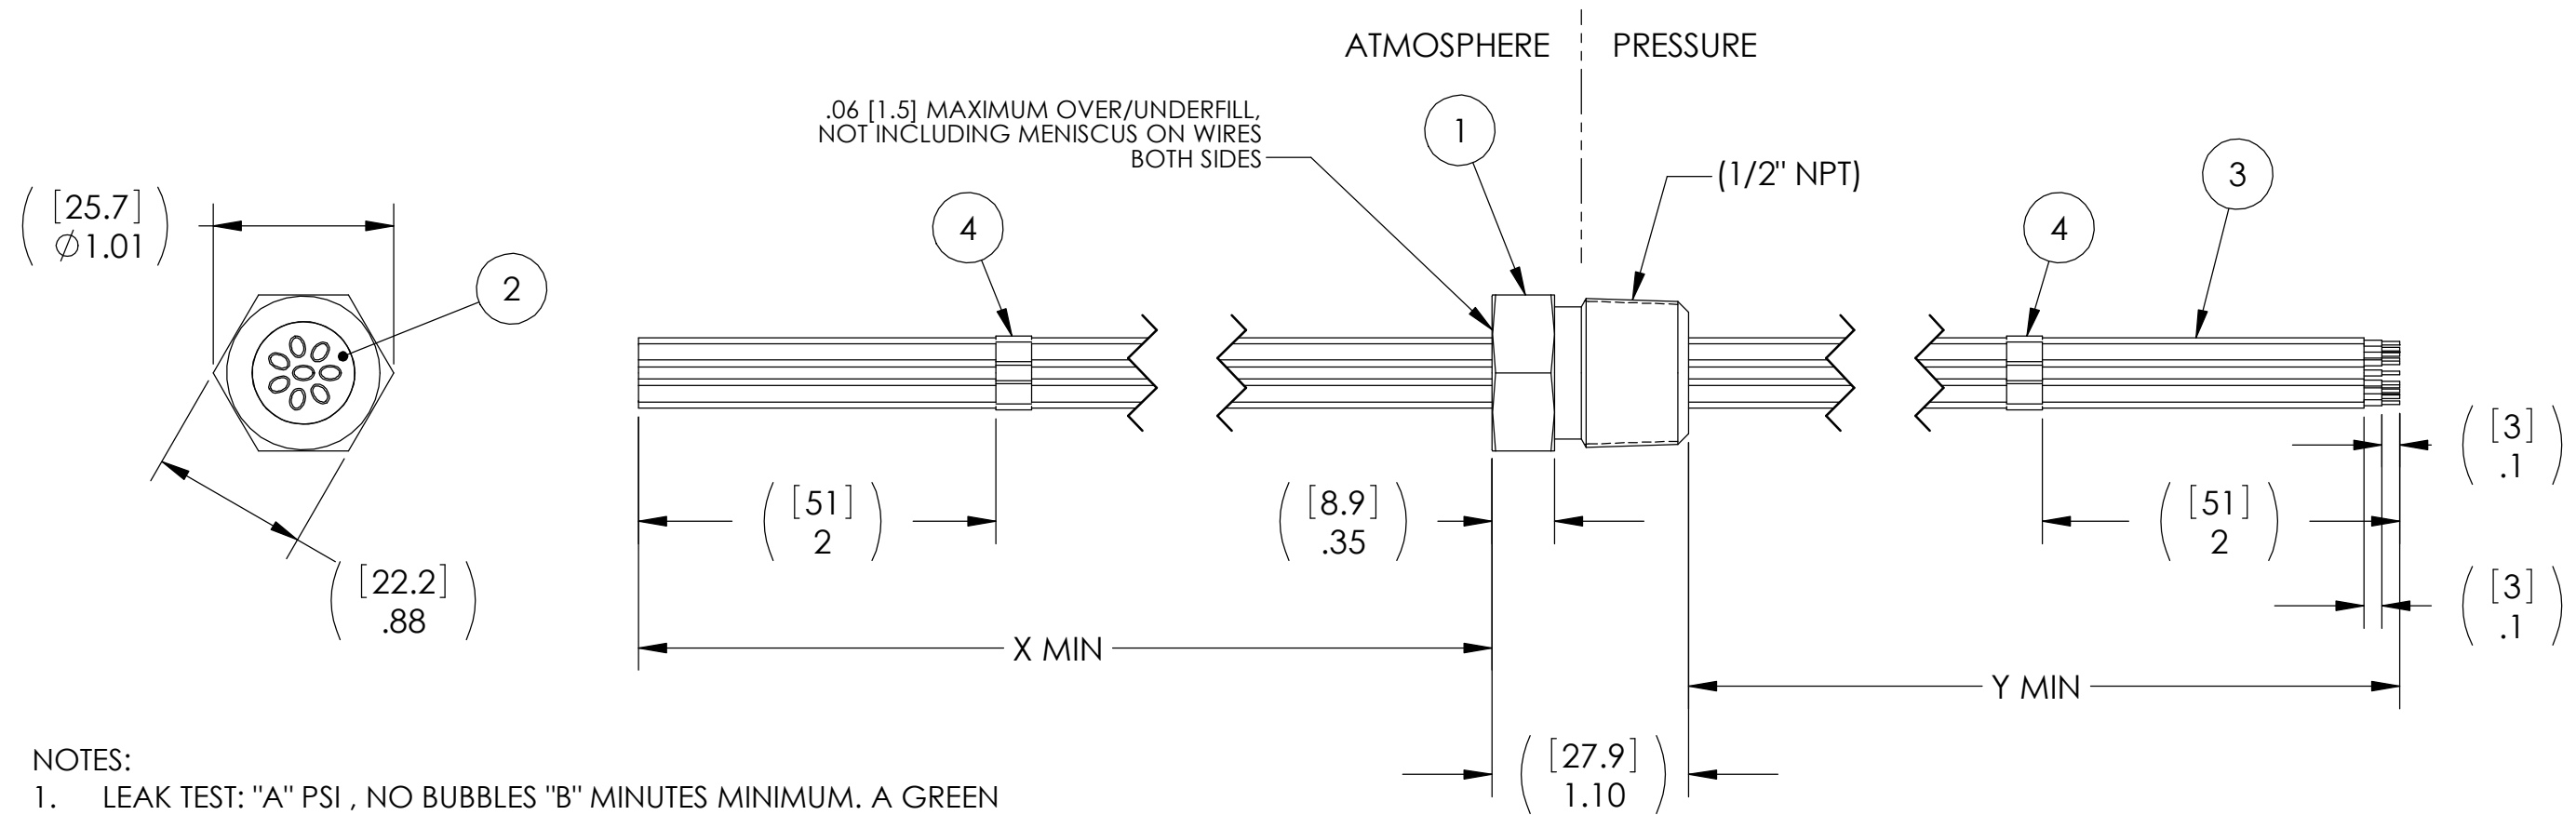

NOTES:

1. LEAK TEST: "A" PSI , NO BUBBLES "B" MINUTES MINIMUM. A GREEN PAINT DOT ON THE ATMOSPHERE SIDE INDICATES THE PART HAS PASSED THE TEST.
2. HYPOT 630 VDC 50 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. WIRE POSITIONING IS APPROXIMATE & VARIABLE.
6. COSMETIC SURFACE VOIDS NOT ON O-RING SEALING SURFACES ARE ACCEPTABLE BASED ON THE SEAL'S DIAMETER:
 <= .5 [12.7] SEAL DIAMETER: ϕ .035 [.89] MAX ALLOWED VOID SIZE
 > .5 [12.7] SEAL DIAMETER: ϕ 0.060 [1.5] MAX ALLOWED VOID SIZE
7. REF-OPERATING TEMPERATURE RANGE -40 °C TO 150 °C.
8. DIMENSIONS ARE INCHES [millimeters].
9. PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

4	16	BRADY MARKERS	BRADY MARKERS 1-8
3	8	SEE TABLE	SEE TABLE
2	A/R	PAVE-Seal 200	EPOXY BLACK
1	1	0346-1	HOUSING PT-8 SS
ITEM	QTY	PART NUMBER	DESCRIPTION

PAVE technology co.

2751 Thunderhawk Court
Dayton, OH 45414-3445
U.S.A.
tel (937) 890-1100
fax (937) 8905165
www.pavetechnologyco.com

DESCRIPTION
SEE TABLE

PART NUMBER
3285*

MATERIAL NOTED

REVISION LEVEL
K

PROJECTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
 X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
 ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS